

(WEAZL5.WEAZL) 24081

WEAZL FIVE DEPARTURE (RNAV)

AL-5726 (FAA)


CHARLOTTE/MONROE EXEC (EQY)
MONROE, NORTH CAROLINA

RNAV 1 - DME/DME/IRU or GPS.

RADAR required.


TOP ALTITUDE:
3000

CHARLOTTE DEP CON
120.05 307.8
ASOS
135.775
CLNC DEL
132.55
UNICOM
122.7

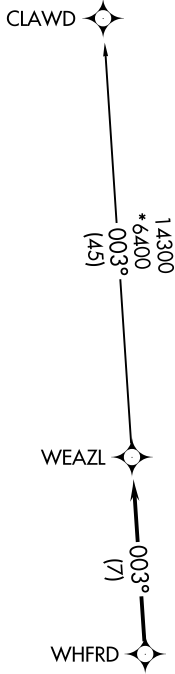

TAKEOFF MINIMUMS
Rwy 5, 23: Standard.

- NOTE: For turbo jets only.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION



Climb on heading assigned by ATC, on RADAR vectors to WHFRD, then on track 003° to WEAZL. Then on CLAWD Transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL5.CLAWD)

WEAZL FIVE DEPARTURE (RNAV)
(WEAZL5.WEAZL) 21MAR24

MONROE, NORTH CAROLINA
CHARLOTTE/MONROE EXEC (EQY)

SE-2, 23 JAN 2025 to 20 FEB 2025

SE-2, 23 JAN 2025 to 20 FEB 2025