WAAS CH 86807 W18A	APP CRS 176°	Rwy Idg 13401 TDZE 602 Apt Elev 606

RNAV (GPS) RWY 18L

DALLAS-FORT WORTH INTL (DFW)

RADAR required for procedure entry. RNP APCH.

Simultaneous approach authorized with Rwy 17L/C/R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1¾ SM.

MALSR (A5)

MISSED APPROACH: Climb to 1100, then climbing right turn to 3000 direct LIKES and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	118.425	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

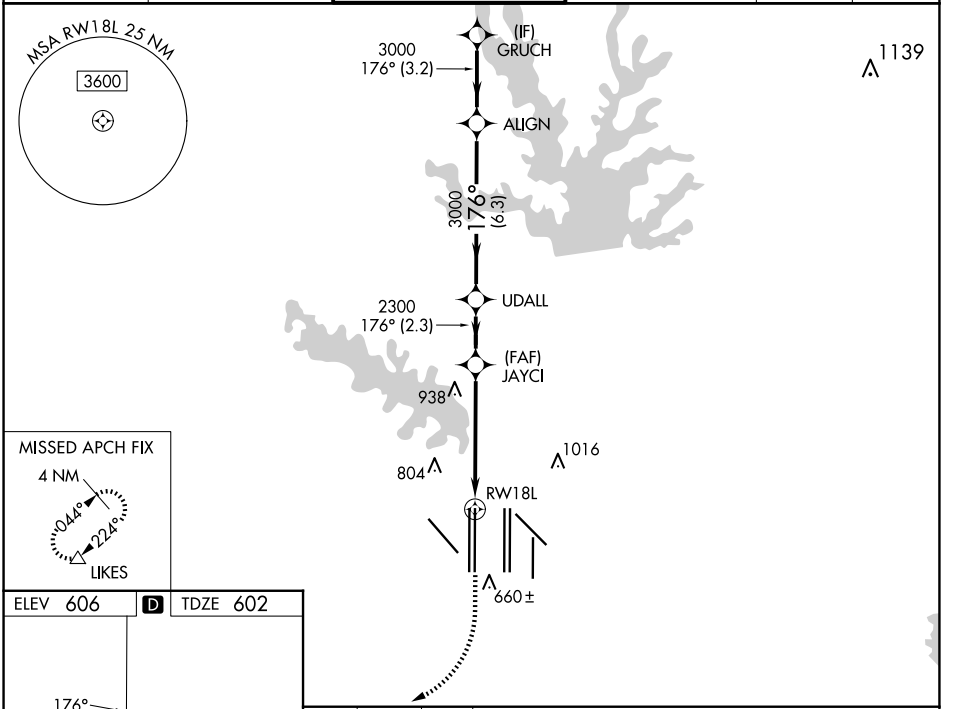

ELEV 606 | D | TDZE 602



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

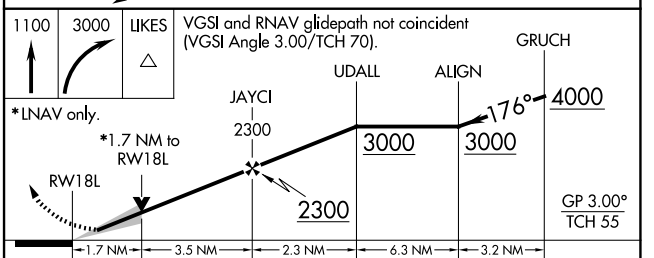

CATEGORY	A	B	C	D
LPV DA	802/18 200 (200-½)			
LNAV/VNAV DA	1013/40 411 (500-¾)			
LNAV MDA	1220/24 618 (700-½)		1220-1⅜ 618 (700-1⅜)	

SC-2, 23 JAN 2025 to 20 FEB 2025
SC-2, 23 JAN 2025 to 20 FEB 2025