
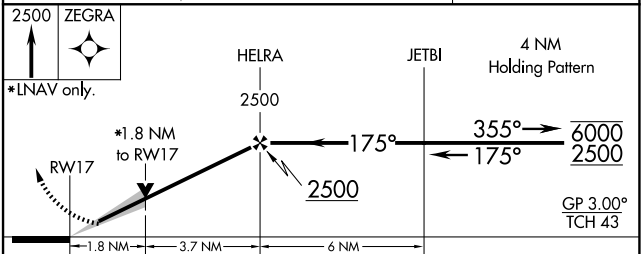
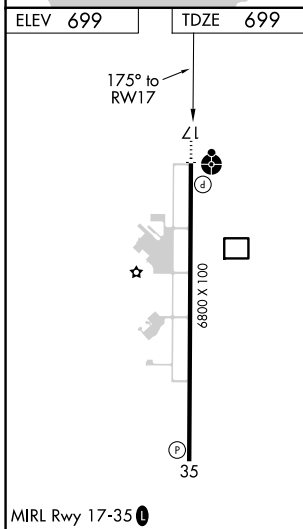


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>99518</b><br><b>W17A</b> | APP CRS<br><b>175°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6800</b><br><b>699</b><br><b>699</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 17

DURANT RGNL/EAKER FLD (DUA)

|  |  |                                  |   |
|--|--|----------------------------------|---|
| RNP APCH.  |  | ODALS                            | MISSED APPROACH: Climb to 2500 direct ZEGRA and hold. |
| <p><b>▼</b> Inop table does not apply to LPV and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1 1/4 SM.</p> |  |                                  |   |
| AWOS-3<br><b>124.175</b>   | FORT WORTH CENTER<br><b>124.75 323.0</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |   |

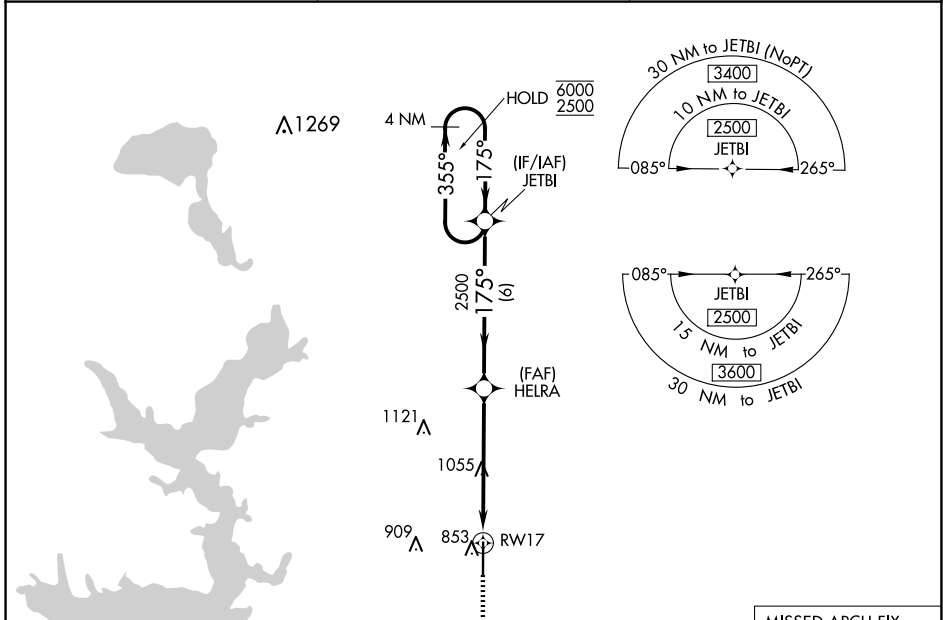

| CATEGORY     | A        | B             | C               | D               |
|--------------|----------|---------------|-----------------|-----------------|
| LPV DA       |          | 899-3/4       | 200 (200-3/4)   | NA              |
| LNAV/VNAV DA |          | 1133-1 1/8    | 434 (500-1 1/8) | NA              |
| LNAV MDA     | 1320-3/4 | 621 (700-3/4) | 1320-1 3/4      | 621 (700-1 3/4) |

SC-1, 23 JAN 2025 to 20 FEB 2025

SC-1, 23 JAN 2025 to 20 FEB 2025