

| | | |
|--|------------------------|---|
| WAAS CH 82538 W35A | APP CRS 354° | Rwy Idg TDZE 1223 Apt Elev 1232 |
|--|------------------------|---|

RNAV (GPS) RWY 35

GEORGE L SCOTT MUNI (3Y2)



RNP APCH.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decarah altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decarah altimeter setting and increase LPV DA to 1524 all Cats and all visibilities 1/8 mile, LNAV/VNAV DA to 1773 all Cats and all visibilities 1/8 mile; increase all MDA 60 feet and LNAV Cat C visibility 1/4 mile.



MISSED APPROACH:
Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER
118.85

UNICOM
122.8 (CTAF) 0

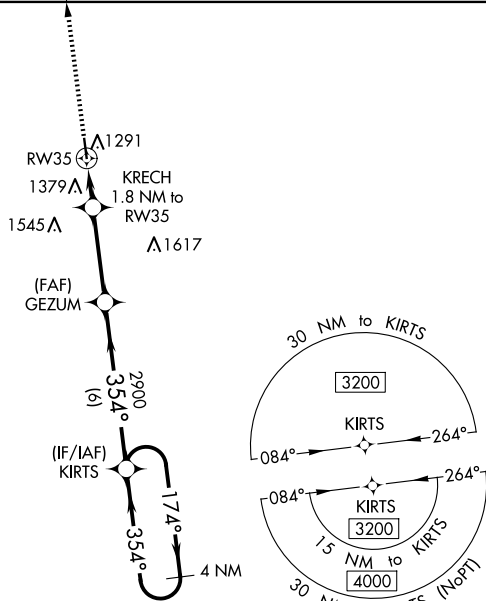

| | |
|-----------|-----------|
| ELEV 1232 | TDZE 1223 |
|-----------|-----------|

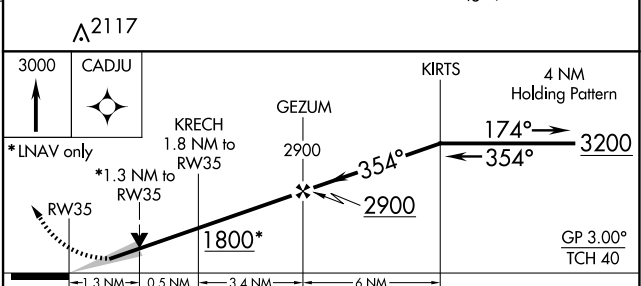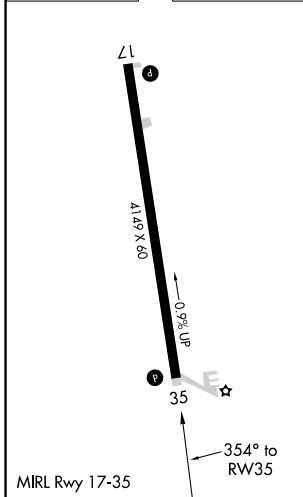

| CATEGORY | A | B | C | D |
|-------------------|----------------------------|-------------|-------------------------------|----|
| LPV DA | 1473-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1722-1 7/8 499 (500-1 7/8) | | | NA |
| LNAV MDA | 1640-1 | 417 (500-1) | 1640-1 1/8 417 (500-1 1/8) | NA |
| C CIRCLING | 1740-1 | 508 (600-1) | 1860-1 3/4 628 (700-1 3/4) | NA |