

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 72838 W28A | APP CRS 276° | Rwy Idg TDZE Apt Elev | 5002 236 240 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 28

BERRIEN COUNTY (4J2)


⚠️ Baro-VNAV NA. Rwy 28 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night. Use Moody AFB altimeter setting. When not received, use Douglas altimeter setting and increase all LPV DA to 602 feet, LNAV/VNAV DA to 561 feet, and all MDA 40 feet. Increase LNAV and Circling Cat C visibility 1/4 SM.

⚠️ NA MISSED APPROACH: Climb to 2200 direct WALPI and hold.

| | | |
|-----------------------------|--|---------------------------------|
| KVAD ATIS ★ 273.5 | VALDOSTA APP CON ★ 126.6 285.6 | UNICOM 122.7 (CTAF) 0 |
|-----------------------------|--|---------------------------------|

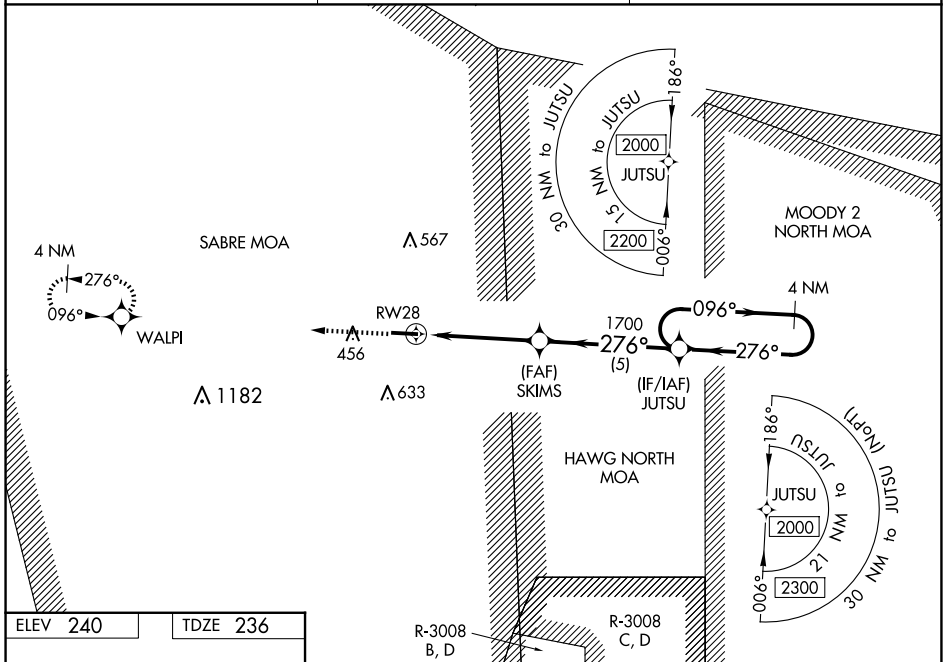

| | |
|-----------------|-----------------|
| ELEV 240 | TDZE 236 |
|-----------------|-----------------|

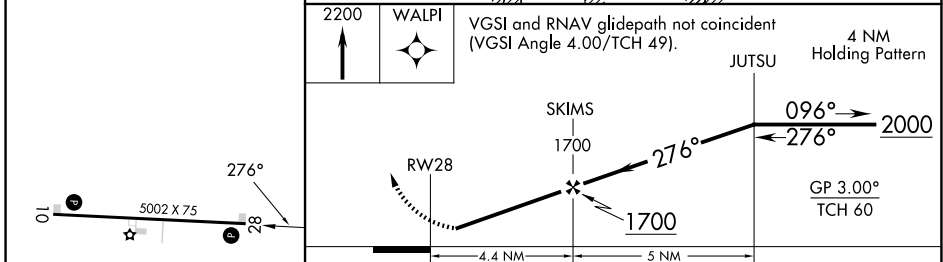

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|------------------------------|----|
| LPV DA | 578-1 | 342 (400-1) | | NA |
| LNAV/VNAV DA | 537-1 | 301 (300-1) | | NA |
| LNAV MDA | 740-1 | 504 (500-1) | 740-1 3/8 504 (500-1 3/8) | NA |
| C CIRCLING | 740-1 500 (600-1) | 800-1 560 (600-1) | 980-2 740 (800-2) | NA |

MIRL Rwy 10-28 **0**
REIL Rwy 10 and 28 **0**

SE-4, 23 JAN 2025 to 20 FEB 2025

SE-4, 23 JAN 2025 to 20 FEB 2025