VORTAC EAU	APP CRS	Rwy Idg	5074
113.65	265°	TDZE	894
Chan 83 (Y)		Apt Elev	895

VOR/DME RWY 27

MENOMONIE MUNI/SCORE FLD (LUM)

When local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDA 60 feet, increase Circling Cat B and C visibility ¼ SM. VDP NA when using Chippewa Valley Rgnl altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct EAU VORTAC and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.025	125.3 335.6	122.7 (CTAF)

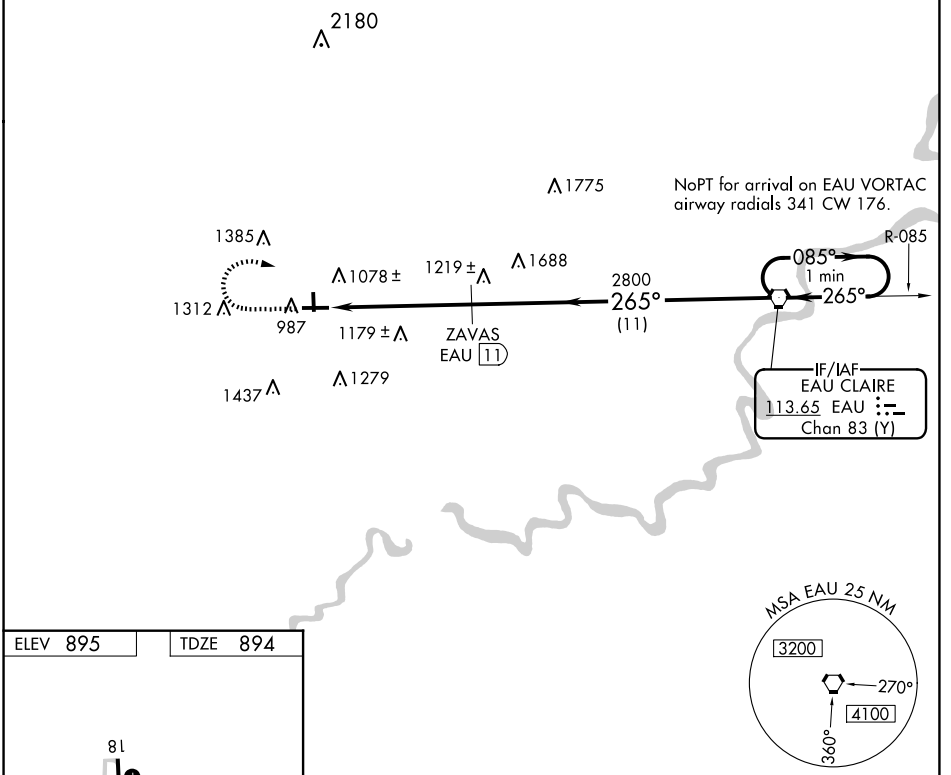

ELEV 895 TDZE 894



REIL Rwys 9 and 27 (L)
MIRL Rwys 9-27 and 18-36 (L)

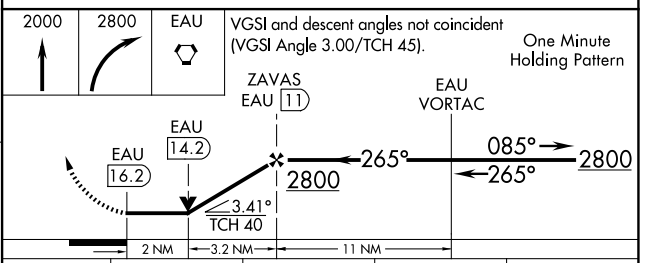

CATEGORY	A	B	C	D
S-27	1560-1 666 (700-1)		1560-1¾ 666 (700-1¾)	NA
C CIRCLING	1560-1 665 (700-1)	1800-1¼ 905 (1000-1¼)	1820-2¾ 925 (1000-2¾)	NA

EC-3, 23 JAN 2025 to 20 FEB 2025
EC-3, 23 JAN 2025 to 20 FEB 2025