

WAAS CH 50308 W24A	APP CRS 241°	Rwy Idg TDZE Apt Elev	5000 666 666
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24



PONTIAC MUNI (PNT)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BML altimeter setting. When local altimeter setting not received, use BML altimeter setting: increase LPV DA to 1014 feet; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3000 direct BUCLA and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

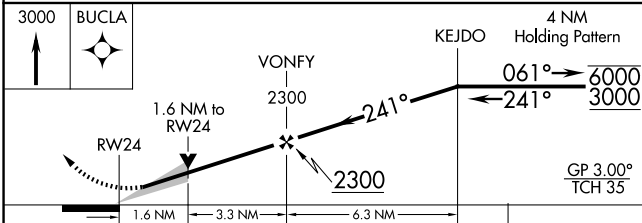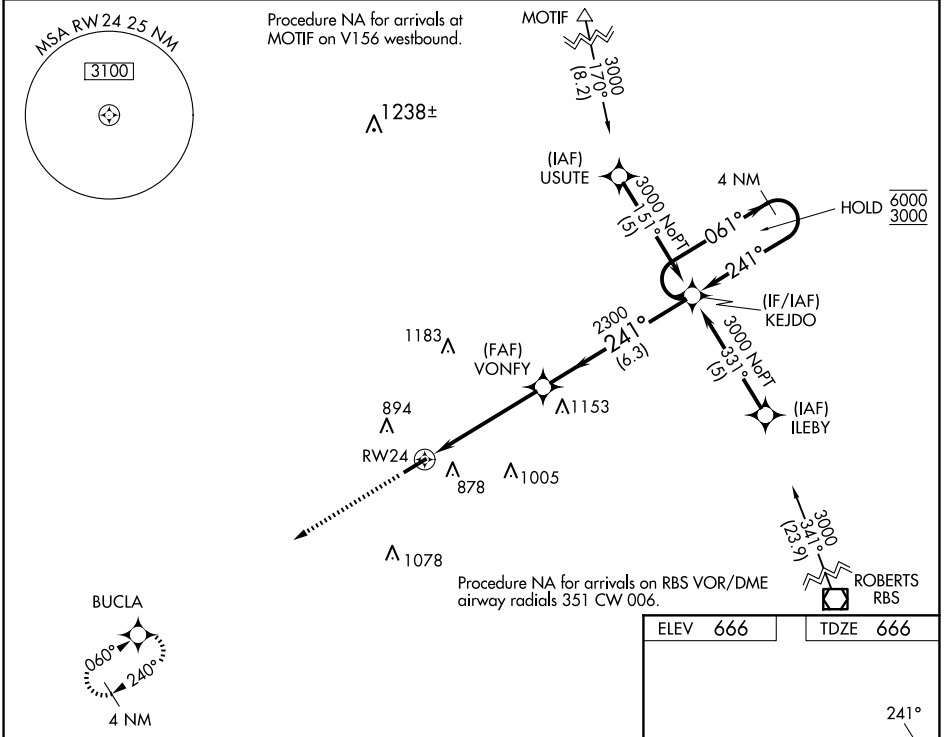

ELEV 666	TDZE 666
----------	----------

CATEGORY	A	B	C	D
LPV DA	916-1	250 (300-1)		NA
LNAV/VNAV DA	1139-1 3/8	473 (500-1 1/8)		NA
LNAV MDA	1220-1	554 (600-1)	1220-1 5/8 554 (600-1 1/8)	NA
CIRCLING	1220-1	554 (600-1)	1320-1 3/4 654 (700-1 1/4)	NA

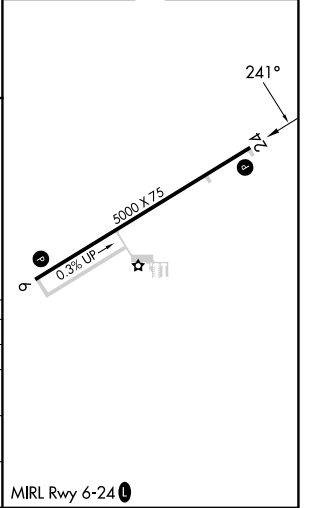

MIRL Rwy 6-24 0

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025