

WAAS CH <b>97737</b> <b>W07A</b>	APP CRS <b>068°</b>	Rwy Idg TDZE Apt Elev	<b>3900</b> <b>966</b> <b>966</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 7

BOLOYER FLD (Y72)


RNP APCH - GPS  
 Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDAs 20 feet, increase LNAV visibility Cat C 1/2 SM.  
 NA Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct GLAKE and hold.


VOLK APP CON ★  
**135.25 244.875**

VOLK CTAF  
**127.5**


CTAF  
**122.9**

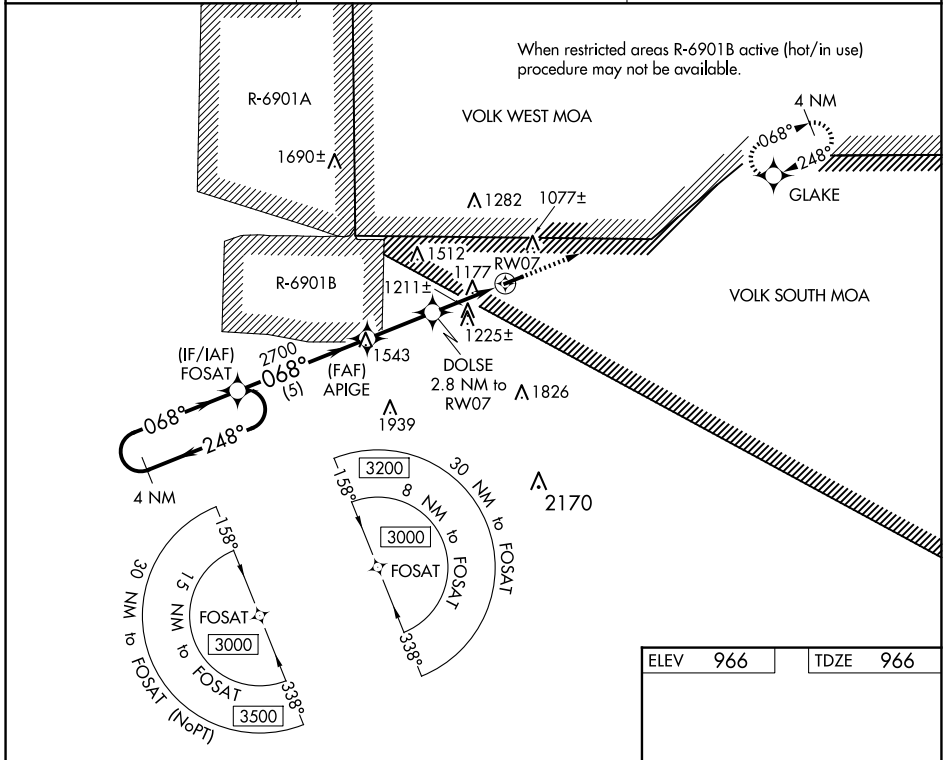

ELEV 966	TDZE 966
----------	----------

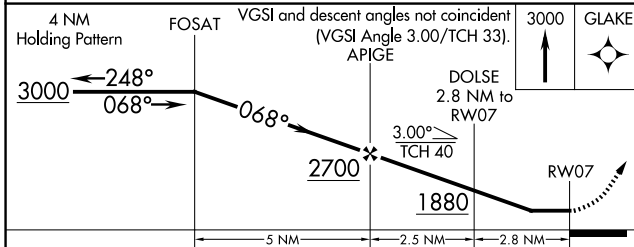

CATEGORY	A	B	C	D
LP MDA	1460-1	494 (500-1)	1460-1 3/8 494 (500-1 3/8)	NA
LNAV MDA	1500-1	534 (600-1)	1500-1 1/2 534 (600-1 1/2)	NA
<b>C</b> CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

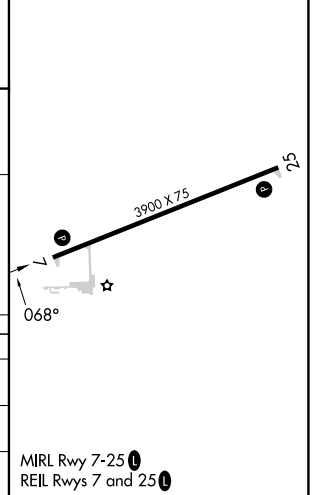

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025