ATLANTA, GEORGIA

AL-26 (FAA)

ILS PRM RWY 27L (CLOSE PARALLEL)

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

LOC/DME I-FSQ	APP CRS	Rwy Idg	8865
108.5	275°	TDZE	999
Chan 22		Apt Elev	1026

RADAR required for procedure entry.
DME or RADAR required.

T Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	
ARR 119.65	119.1	125.325	123.85	119.3	119.5	254.4	
DEP 125.55	127.9	379.9	PRM 132.55				

GND CON			ALL RWYS
(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	
121.9	121.75	121.65	254.4

CLNC DEL	CPDLC
118.1	

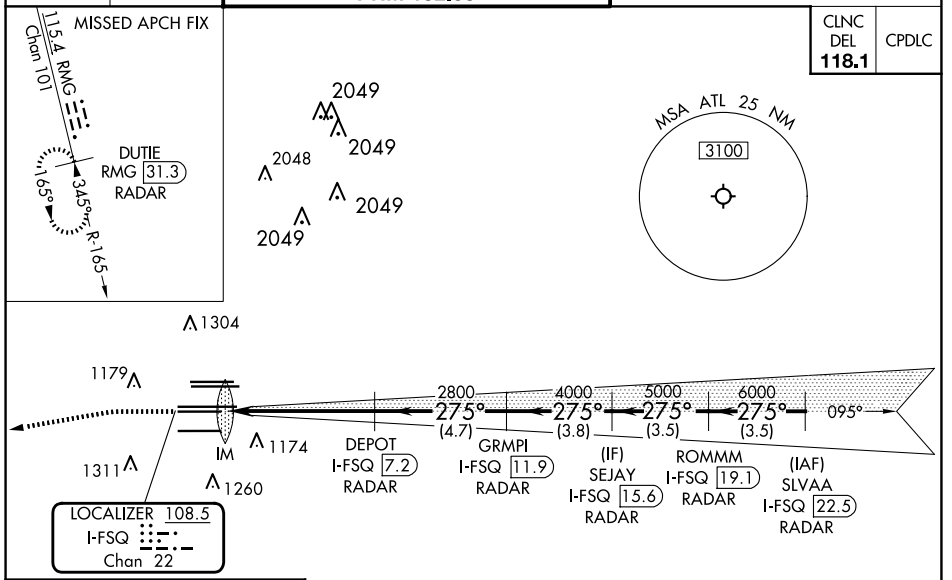

ELEV 1026 | D | TDZE 999



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

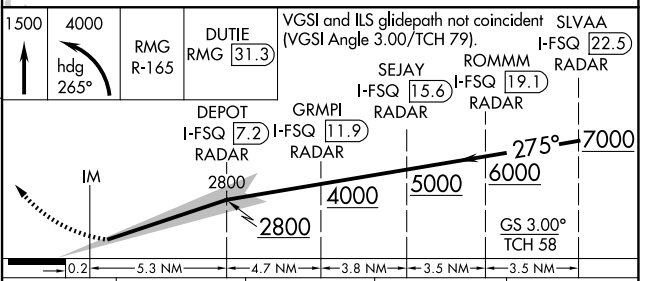

CATEGORY	A	B	C	D
S-ILS 27L	1199/18	200 (200-½)		