LOC I-AUG	APP CRS	Rwy Idg	5002
108.7	171°	TDZE	348
		Apt Elev	352

ILS or LOC RWY 17
AUGUSTA STATE (AUG)

ADF required.

T A Localizer unusable from 0.5 NM to threshold above 1500 feet. When local altimeter setting not received, use Waterville altimeter setting: increase S-ILS 17 DA to 583; increase all MDAs 40 feet and visibility S-LOC 17 Cat C and D ⅛ SM, and Circling Cat D ¼ SM; SHAWE fix minimums increase S-LOC 17 Cat C and D visibility ⅛ SM, and Circling Cat D visibility ¼ SM. Glideslope unusable below 430 feet. Circling Rwy 8, 26 NA at night. # DME from AUG VOR/DME.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct DUNNS LOM and hold.

ASOS	PORTLAND APP CON ★	CLNC DEL	UNICOM
118.325	128.35 299.2	119.95 299.2	123.0 (CTAF) L

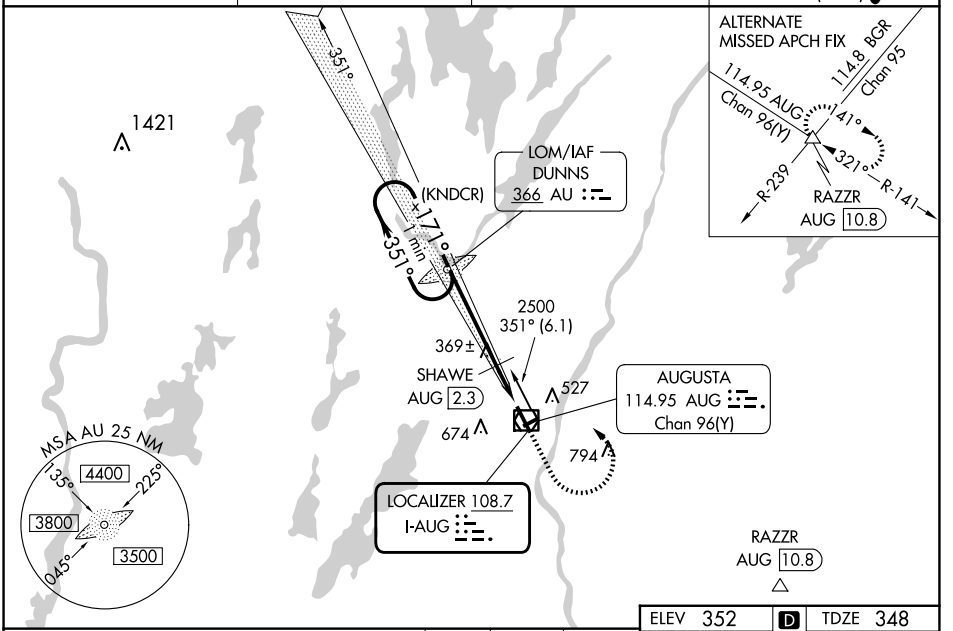

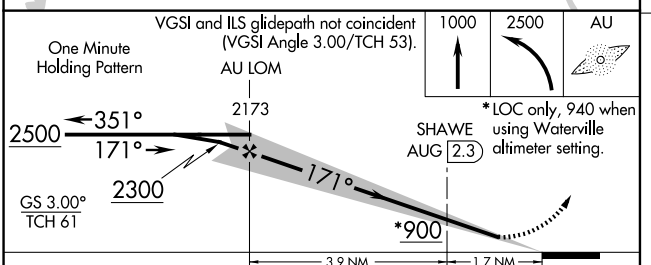

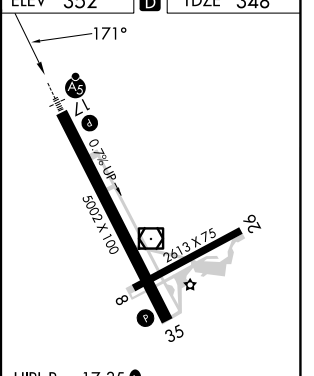

CATEGORY	A	B	C	D
S-ILS 17	548-½ 200 (200-½)			
S-LOC 17	900-½ 552 (600-½)		900-1¼ 552 (600-1¼)	
C CIRCLING	940-1 588 (600-1)	980-1 628 (700-1)	980-1¾ 628 (700-1¾)	1160-2½ 808 (900-2½)
SHAWE FIX MINIMUMS #				
S-LOC 17	620-½ 272 (300-½)			
C CIRCLING	940-1 588 (600-1)	980-1 628 (700-1)	980-1¾ 628 (700-1¾)	1160-2½ 808 (900-2½)

HIRL Rwy 17-35 L
MIRL Rwy 8-26 L
REIL Rwy 35 L

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

NE-1, 20 FEB 2025 to 20 MAR 2025
NE-1, 20 FEB 2025 to 20 MAR 2025