




WAAS CH 63218 W33A	APP CRS 334°	Rwy Idg TDZE Apt Elev	9001 45 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 33

CHARLESTON AFB/INTL (CHS)

RNP APCH.	MALSR 	MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. # RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-------------------------	--	--	-------------------------------	-----------------------------------	-------

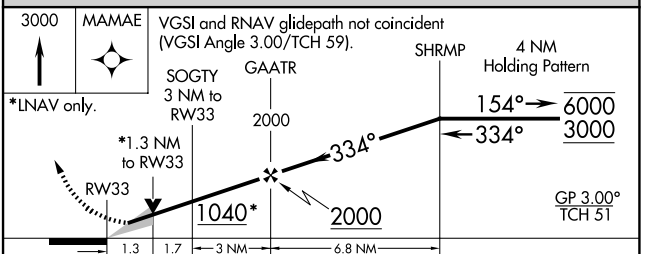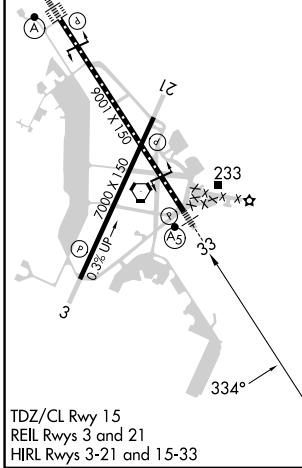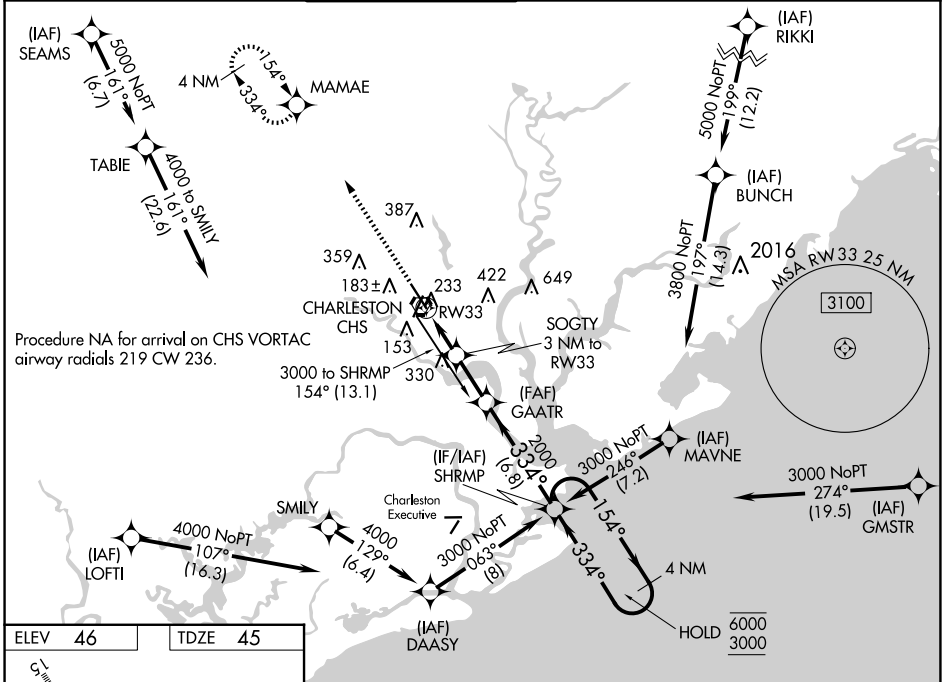

CATEGORY	A	B	C	D
LPV DA #	245/24		200 (200-½)	
LNAV/VNAV DA	472/40		427 (500-¾)	
LNAV MDA	500/24 455 (500-½)		500/45 455 (500-¾)	
<input checked="" type="checkbox"/> CIRCLING	540-1 494 (500-1)		540-1½ 494 (500-1½) 740-2¼ 694 (700-2¼)	

SE-2, 20 FEB 2025 to 20 MAR 2025

SE-2, 20 FEB 2025 to 20 MAR 2025