ILS or LOC RWY 36C

CHARLOTTE/DOUGLAS INTL (CLT)

LOC I-DQG	APP CRS	Rwy Idg 10000
111.7	003°	TDZE 707
		Apt Elev 748

RADAR required for procedure entry. DME or RADAR required.

Circling NA at night. Simultaneous approach authorized. DQG ILS LLZ Rwy 36C unusable for rollout guidance.

ALSF-2

MISSED APPROACH: Climb to 3000 on CLT VOR/DME R-001 to TOMME/CLT 15.4 DME and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER			GND CON	CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R)	118.1	257.8	121.8 348.6 (WEST)	127.15
DEP 132.1	(120°-295°)	120.05	(Rwy 18C-36C)	126.4	257.8	121.9 348.6 (EAST)	348.6
	(296°-360°)	134.75	(Rwy 18R-36L)	133.35	257.8		CPDLC
	(180°-359°)	257.2					
	(360°-179°)	307.8					

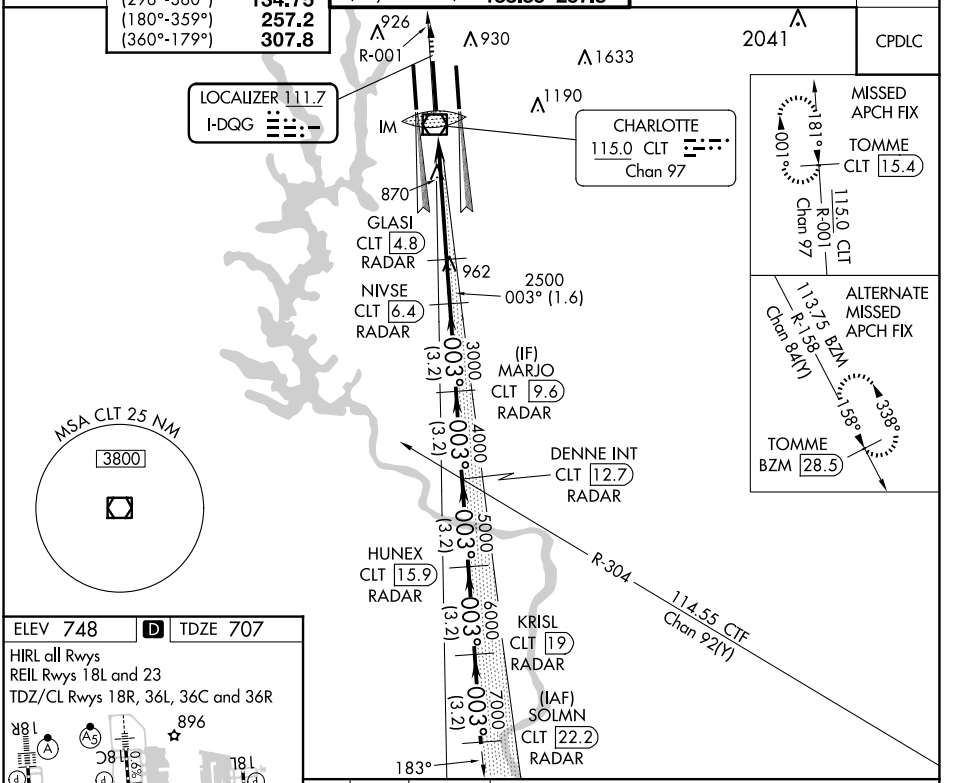

ELEV 748 | D | TDZE 707

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

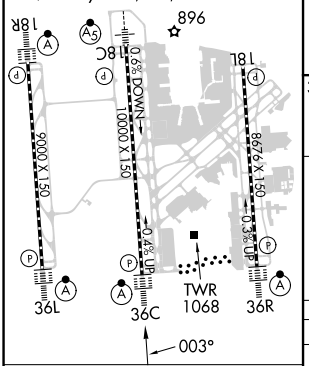

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

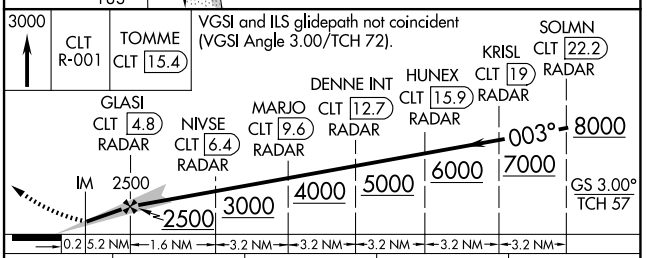

CATEGORY	A	B	C	D
S-ILS 36C	907/18 200 (200-½)			
S-LOC 36C	1120/24 413 (400-½)			
C CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 20 FEB 2025 to 20 MAR 2025
SE-2, 20 FEB 2025 to 20 MAR 2025