


D-ATIS ARR 133.675
 DEP 118.125
 METRO TOWER
 118.4 (Rwy 03L-21R, 03R-21L, 27R)
 128.75 (Rwy 27L)
 135.0 (Rwy 04L-22R, 04R-22L)
 317.725
 CLNC DEL
 120.65
 CPDLC
 PDC
D

JANUARY 2020
 ANNUAL RATE OF CHANGE
 0.0° W

EC-1, 20 FEB 2025 to 20 MAR 2025

EC-1, 20 FEB 2025 to 20 MAR 2025

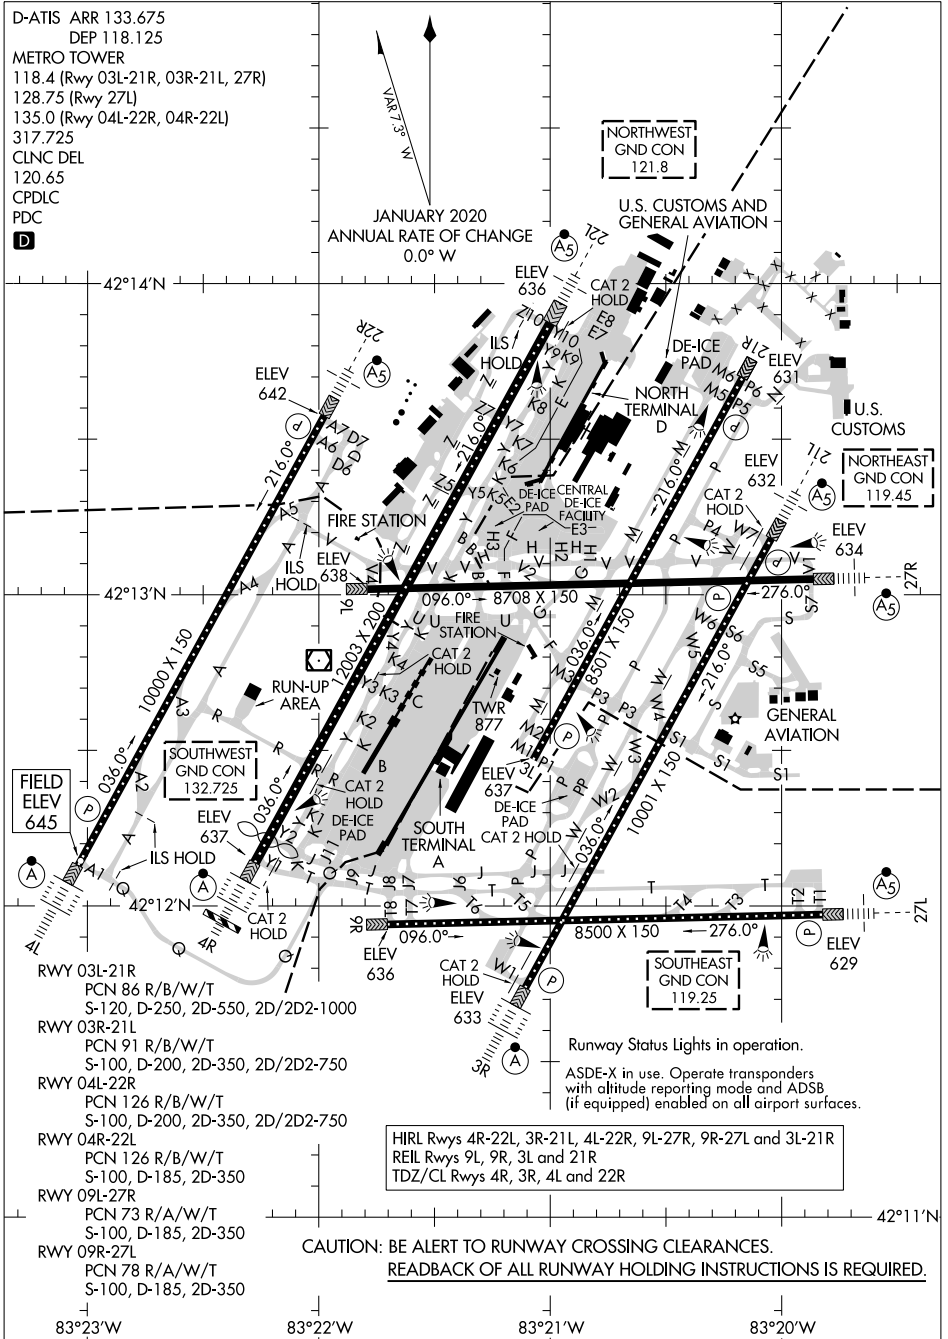

RWY 03L-21R
 PCN 86 R/B/W/T
 S-120, D-250, 2D-550, 2D/2D2-1000

RWY 03R-21L
 PCN 91 R/B/W/T
 S-100, D-200, 2D-350, 2D/2D2-750

RWY 04L-22R
 PCN 126 R/B/W/T
 S-100, D-200, 2D-350, 2D/2D2-750

RWY 04R-22L
 PCN 126 R/B/W/T
 S-100, D-185, 2D-350

RWY 09L-27R
 PCN 73 R/A/W/T
 S-100, D-185, 2D-350

RWY 09R-27L
 PCN 78 R/A/W/T
 S-100, D-185, 2D-350

HIRL Rwy 4R-22L, 3R-21L, 4L-22R, 9L-27R, 9R-27L and 3L-21R
 REIL Rwy 9L, 9R, 3L and 21R
 TDZ/CL Rwy 4R, 3R, 4L and 22R

Runway Status Lights in operation.
 ASDE-X in use. Operate transponders with altitude reporting mode and ADSB (if equipped) enabled on all airport surfaces.

**CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
 READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.**