APP CRS	Rwy Idg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) W RWY 21L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	125.15 284.0	118.4 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

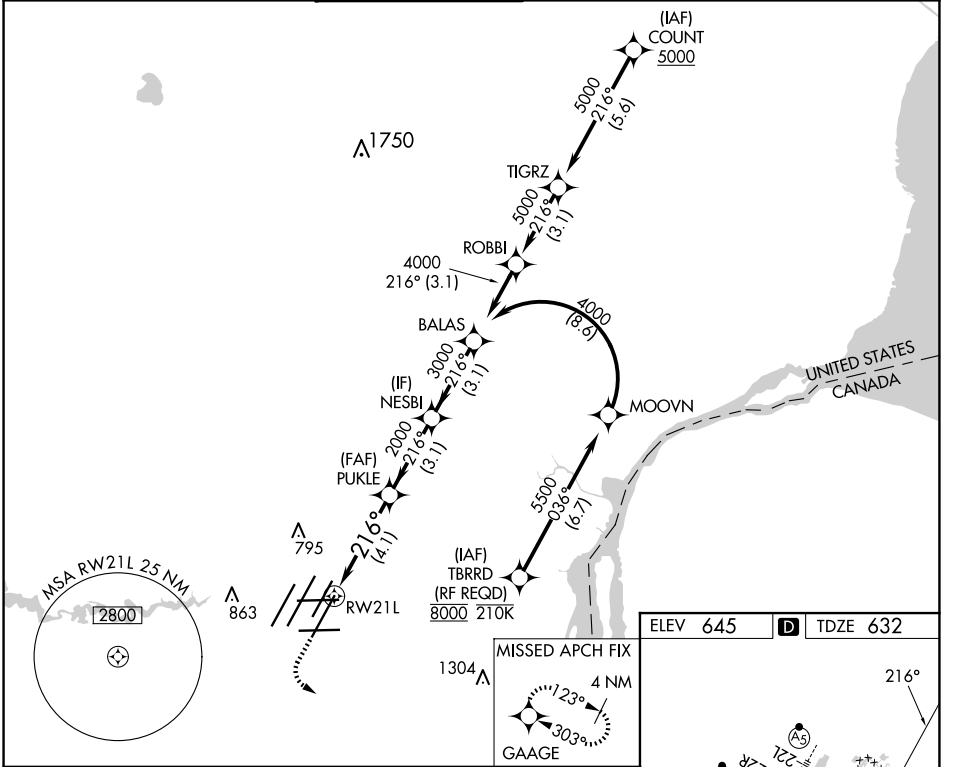

ELEV 645 D TDZE 632



HIRL all runways
REIL Rwys 3L, 9L, 9R and 21R
TDZ/CL Rwys 3R, 4L, 4R and 22R

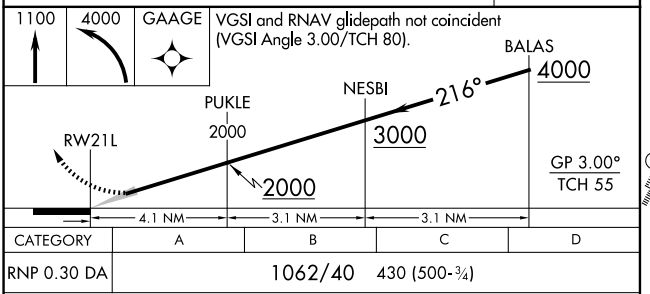

CATEGORY	A	B	C	D
RNP 0.30 DA	1062/40	430 (500-¾)		

AUTHORIZATION REQUIRED

EC-1, 20 FEB 2025 to 20 MAR 2025
EC-1, 20 FEB 2025 to 20 MAR 2025