# RNAV (GPS) Y RWY 22

EL PASO INTL (ELP)

| WAAS | APP CRS | Rwy Idg | 12020 |
|---|---|---|---|
| CH 78244 | 222° | TDZE | 3950 |
| W22A | | Apt Elev | 3962 |

RNP APCH - GPS.

ASR: Circling NA for Cat D north of Rwy 26R and northwest of Rwy 4. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS increase LNAV/VNAV Cats A/B/C visibility to RVR 4000, Cat D visibility to RVR 4500 and LNAV Cat C/D visibility to RVR 5500.

MALSR (A5)

MISSED APPROACH: Climb to 4600 then climbing left turn to 8000 direct GIFEN and hold, continue climb-in-hold to 8000.

| D-ATIS | EL PASO APP CON | EL PASO TOWER | GND CON | CLNC DEL |
|---|---|---|---|---|
| 120.0 254.3 | 124.25 298.85 | 118.3 239.275 | 121.9 348.6 | 125.0 379.1 |

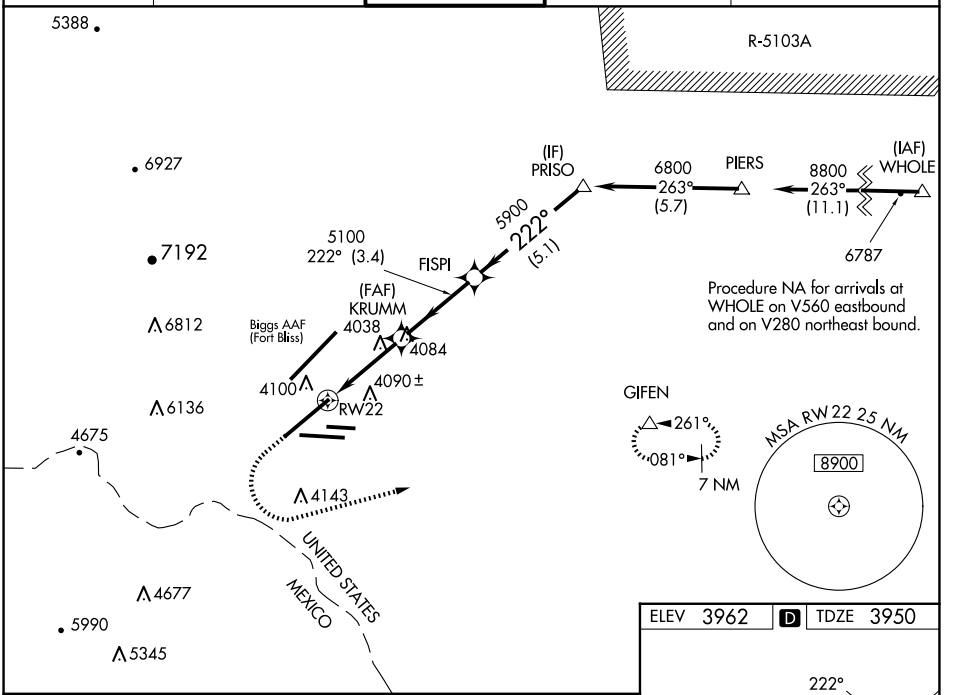


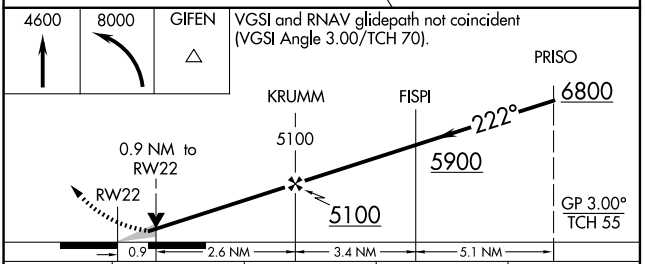


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 4150/24 200 (200-½) | | | |
| LNAV/VNAV DA | 4200/24 250 (300-½) | | | 4221/24 271 (300-½) |
| LNAV MDA | 4300/24 350 (400-½) | | 4300/30 350 (400-⅝) | |
| C CIRCLING | 4420-1 458 (500-1) | 4440-1 478 (500-1) | 4480-1½ 518 (600-1½) | 4680-2¼ 718 (800-2¼) |

ELEV 3962 D TDZE 3950




MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L



SC-3, 20 FEB 2025 to 20 MAR 2025
SC-3, 20 FEB 2025 to 20 MAR 2025