

| | | |
|--|------------------------|---|
| WAAS CH 86209 W04A | APP CRS 041° | Rwy Idg 7602 TDZE 44 Apt Elev 46 |
|--|------------------------|---|

RNAV (GPS) RWY 4



WILLIAM P HOBBY (HOU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). For inop ALSF-2, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cat C/D/E visibility to 1¾ mile. DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH:
Climb to 2000 direct RAYCI and hold.

| | | | | | |
|------------------------|--|-----------------------------------|-------------------------|---------------------------|-------|
| D-ATIS 124.6 | HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST | HOBBY TOWER 118.7 256.9 | GND CON 121.9 | CLNC DEL 125.45 | CPDLC |
|------------------------|--|-----------------------------------|-------------------------|---------------------------|-------|

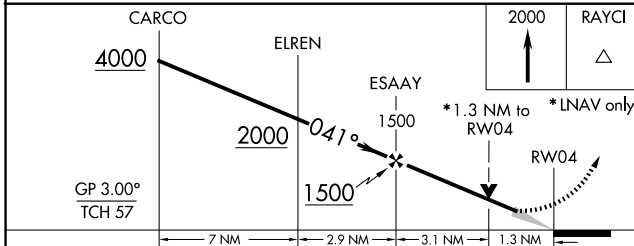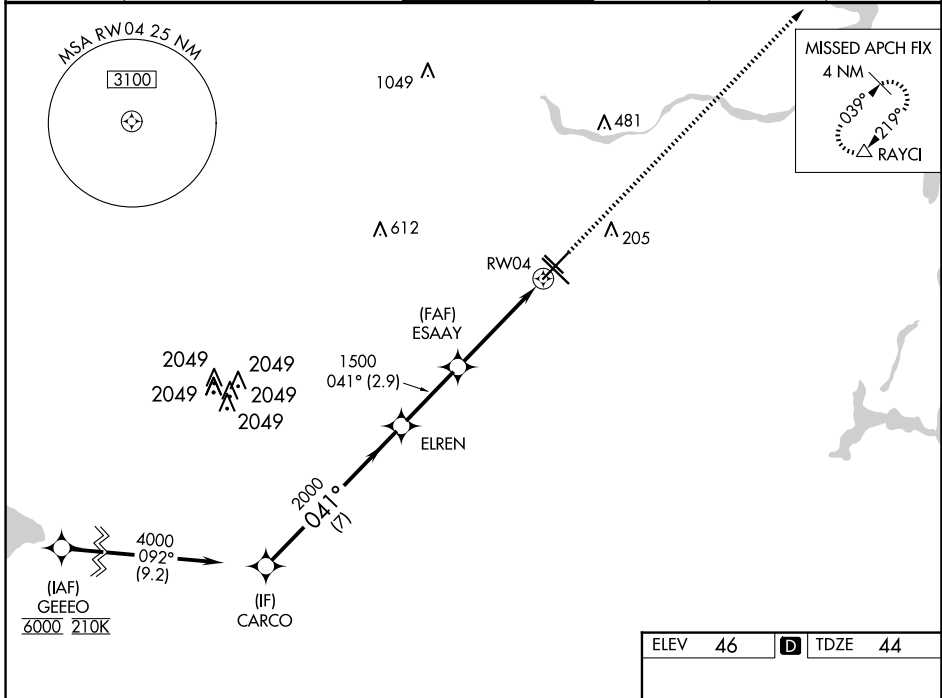

| | |
|---------|------------------|
| ELEV 46 | D TDZE 44 |
|---------|------------------|

TWR 190

REIL Rwy 31L
MIRL Rwy 13L-31R
HIRL Rws 4-22 and 13R-31L
TDZ/CL Rws 4, 13R and 31L

| CATEGORY | A | B | C | D | E |
|-------------------|--------|-------------|-------------|--------------|----------------------|
| LPV DA | | 244/18 | 200 (200-½) | | |
| LNAV/VNAV DA | | 440/45 | 396 (400-¾) | | |
| LNAV MDA | 520/24 | 476 (500-½) | 520/50 | 476 (500-1) | |
| C CIRCLING | 520-1 | 474 (500-1) | 740-2¼ | 694 (500-2¼) | 860-3 814 (900-3) |

SC-5, 20 FEB 2025 to 20 MAR 2025

SC-5, 20 FEB 2025 to 20 MAR 2025