

|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>56416</b><br><b>W34A</b> | APP CRS<br><b>339°</b> | Rwy Idg<br>TDZE <b>322</b><br>Apt Elev <b>341</b> | <b>5387</b> |
|--|------------------------|---|-------------|


# RNAV (GPS) RWY 34

HAWKINS FLD (HKS)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimeter setting. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 19 feet and all MDA 20 feet. Increase LPV and LNAV/VNAV all Cats visibility 1/8 mile and Circling Cat C visibility 1/4 mile. Rwy 34 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:  
Climb to 2000 direct OCARO and hold.

|                        |   |   |                               |   |                         |
|------------------------|---|---|-------------------------------|---|-------------------------|
| ASOS<br><b>120.625</b> | JACKSON APP CON *<br><b>123.9 319.2</b> | HAWKINS TOWER *<br><b>119.65 (CTAF) 257.8</b> | GND CON<br><b>121.9 239.0</b> | CLNC DEL<br><b>121.9</b><br>(When twr closed) | UNICOM<br><b>122.95</b> |
|------------------------|---|---|-------------------------------|---|-------------------------|

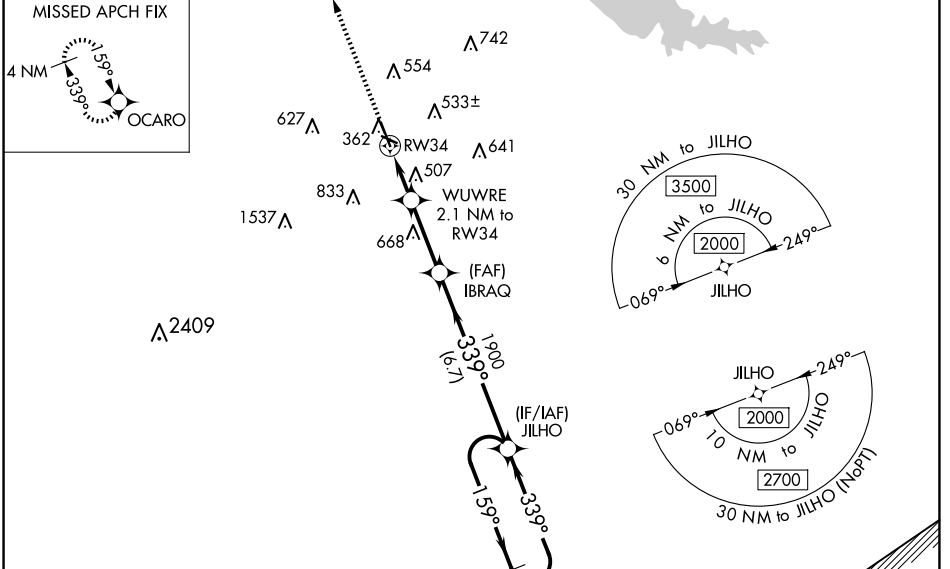

|                 |                 |
|-----------------|-----------------|
| ELEV <b>341</b> | TDZE <b>322</b> |
|-----------------|-----------------|

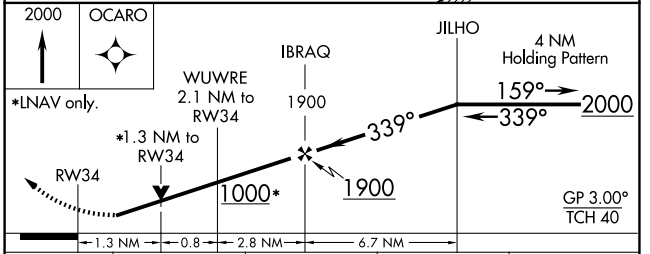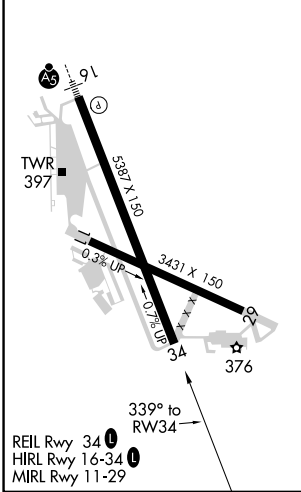

| CATEGORY          | A                    | B                    | C                             | D                      |
|-------------------|----------------------|----------------------|-------------------------------|------------------------|
| LPV DA            |                      | 588-7/8              | 266 (300-7/8)                 |                        |
| LNAV/VNAV DA      |                      | 670-1 1/8            | 348 (400-1 1/8)               |                        |
| LNAV MDA          | 760-1                | 438 (500-1)          | 760-1 3/8                     | 438 (500-1 3/8)        |
| <b>C</b> CIRCLING | 860-1<br>519 (600-1) | 880-1<br>539 (600-1) | 1140-2 1/4<br>799 (800-2 1/4) | 1320-3<br>979 (1000-3) |

SC-4, 20 FEB 2025 to 20 MAR 2025

SC-4, 20 FEB 2025 to 20 MAR 2025