

APP CRS	Rwy Idg	<b>10000</b>
<b>350°</b>	TDZE	<b>464</b>
	Apt Elev	<b>501</b>

# RNAV (RNP) Z RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH - GPS.




For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALSF-2



**MISSED APPROACH:** Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
<b>118.725</b>	<b>132.075 327.0</b>	<b>124.2 257.8</b>	<b>121.7 348.6</b>	<b>126.1 275.8</b>	

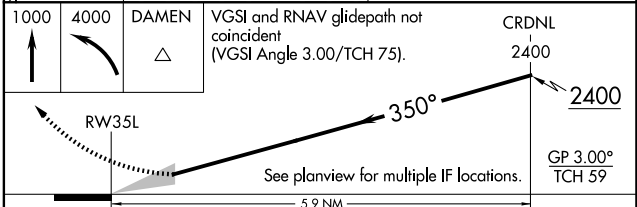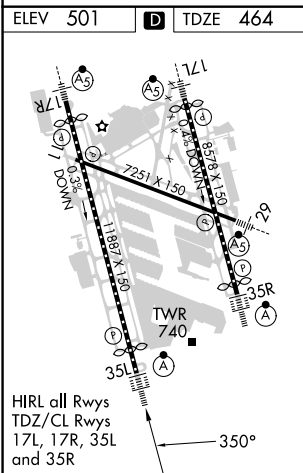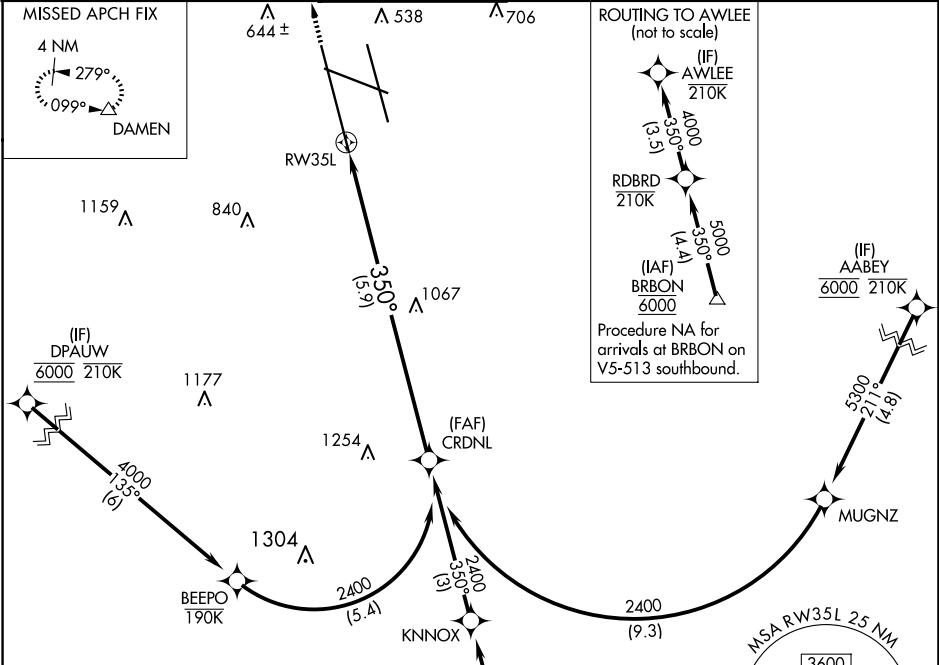

CATEGORY	A	B	C	D
RNP 0.11 DA		769/24	305 (300-½)	
RNP 0.30 DA		897/40	433 (400-¾)	

**AUTHORIZATION REQUIRED**

SE-1, 20 FEB 2025 to 20 MAR 2025

SE-1, 20 FEB 2025 to 20 MAR 2025