RNAV (GPS) RWY 26R

MIAMI INTL (MIA)

WAAS CH 86903 W26A	APP CRS 272°	Rwy Idg 8600 / TDZE 9 / Apt Elev 9

RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15 DEP 133.675	124.85 322.3	118.3 256.9	121.8 (Rwys 8L/R, 12, 26L/R) 348.6 127.5 (Rwys 9, 27, 30)	135.35	

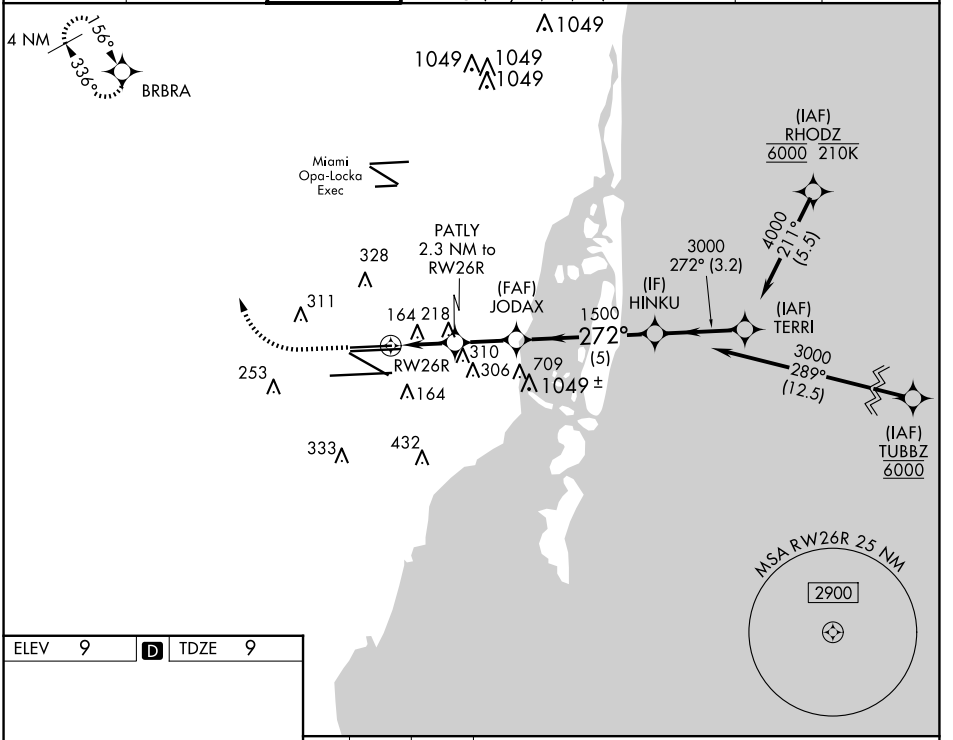

ELEV 9 | D | TDZ 9



TDZ/CL Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

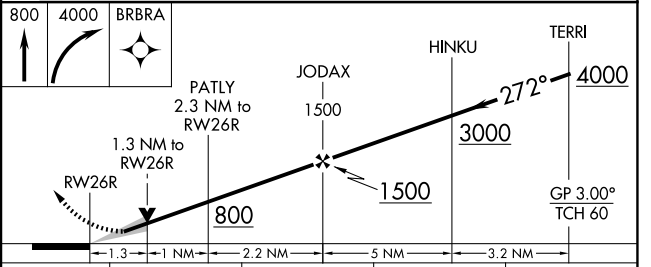

CATEGORY	A	B	C	D
LPV DA	265-¾ 256 (300-¾)			
LNAV/VNAV DA	432-1¼ 423 (500-1¼)			
LNAV MDA	480-1 471 (500-1)		480-1⅜ 471 (500-1⅜)	

SE-3, 20 FEB 2025 to 20 MAR 2025
SE-3, 20 FEB 2025 to 20 MAR 2025