

MIAMI, FLORIDA

AL-257 (FAA)


24137

APP CRS	Rwy Idg	7913
305°	TDZE	8
	Apt Elev	9

RNAV (RNP) Y RWY 30
MIAMI INTL (MIA)

⚠ For inoperative MALS, increase RNP 0.23 all Cats visibility to 1½, RNP 0.30 all Cats to 1¾. GPS Required. ⚠ NA For uncompensated Baro-VNAV systems, procedure NA below 6°C (42°F) or above 48°C (119°F).	MALS 	MISSED APPROACH: Climb to 3000 direct VEPCO and via 342° track to BRBRA and hold.
--	---	---

ARR	D-ATIS	MIAMI APP CON		MIAMI TOWER		GND CON		CLNC DEL	CPDLC
DEP	119.15 133.675	124.85	322.3	118.3	256.9	121.8 127.5	(8L/8R/12/26L/26R) (9/27/30) 348.6	135.35	

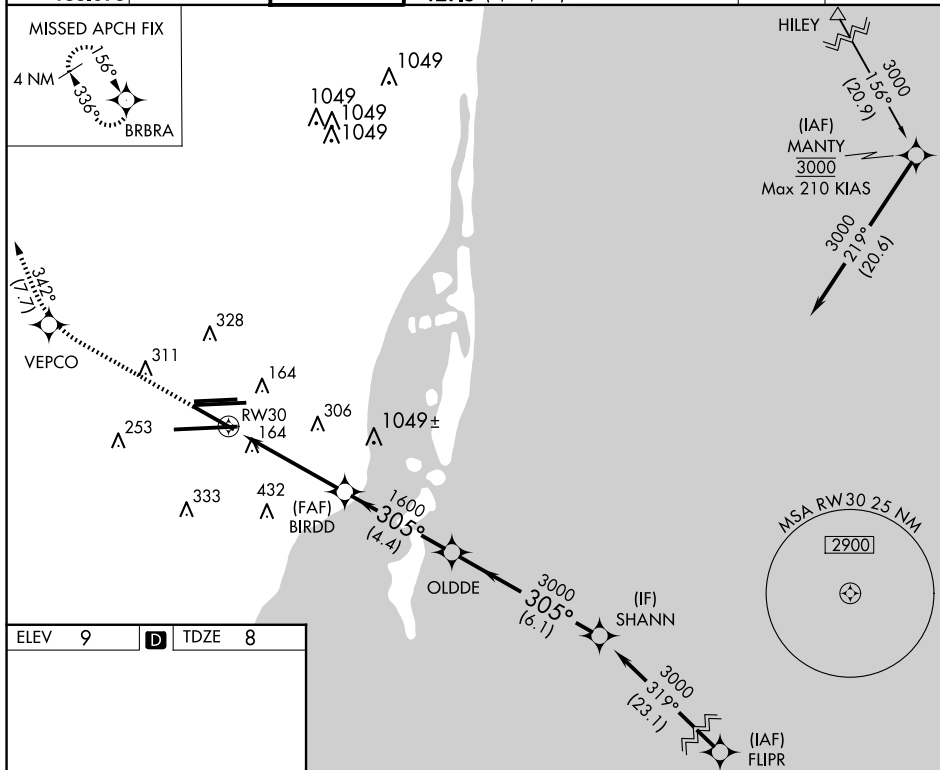

VGSIs and RNAV glidepath not coincident
(VGS Angle 3.00/TCH 71).

Procedure Turn NA

CATEGORY	A	B	C	D
RNP 0.23 DA		426-1¼	418 (500-1½)	
RNP 0.30 DA		521-1½	513 (600-1½)	

AUTHORIZATION REQUIRED

MIAMI, FLORIDA
Orig-A 30JUN11

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Y RWY 30

SE-3, 20 FEB 2025 to 20 MAR 2025