

WAAS CH 70304 W32A	APP CRS 320°	Rwy ldg TDZE Apt Elev	9618 25 26
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 32

MOBILE INTL (BFM)

RNP APCH - GPS.




▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000, and LNAV Cats C/D visibility to RVR 5500.

MALS



MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct WORIR and hold.

ATIS 135.575	MOBILE APP CON ★ 118.5 269.3	INTERNATIONAL TOWER★ 118.8 (CTAF) 0 251.1	GND CON 121.7 239.3	UNICOM 122.95
------------------------	--	--	-------------------------------	-------------------------

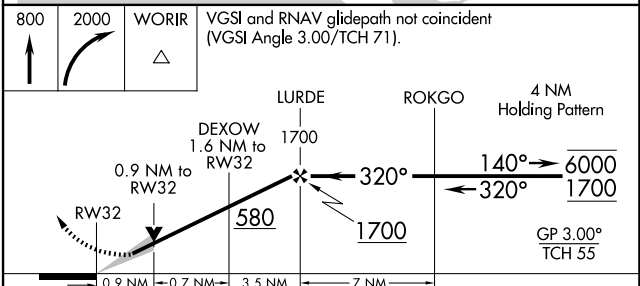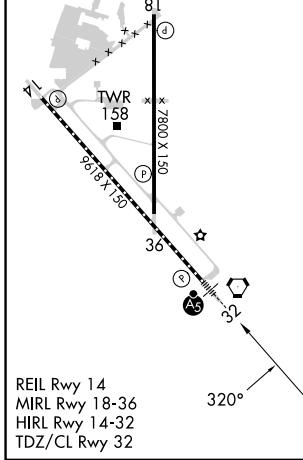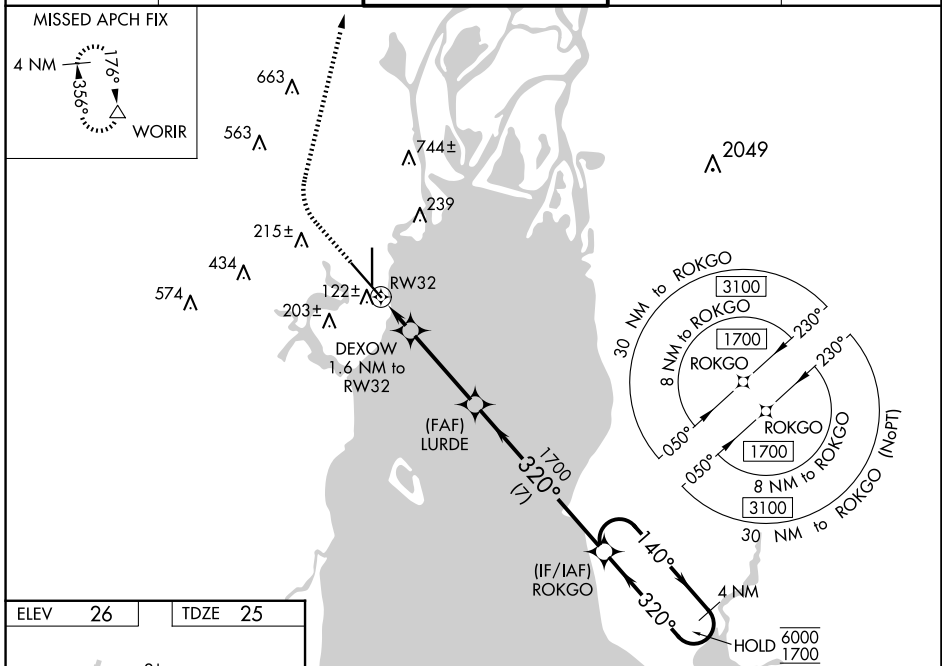

CATEGORY	A	B	C	D
LPV DA		225/18	200 (200-1/2)	
LNAV/VNAV DA		283/24	258 (300-1/2)	
LNAV MDA	380/24	355 (400-1/2)	380/30	355 (400-3/4)
CIRCLING	680-1	654 (700-1)	680-1 3/4 654 (700-1 3/4)	1100-3 1074 (1100-3)

SE-4, 20 FEB 2025 to 20 MAR 2025

SE-4, 20 FEB 2025 to 20 MAR 2025