LOC/DME I-UUH	APP CRS	Rwy Idg	12000
111.9	344°	TDZE	4229
Chan 56		Apt Elev	4231

ILS or LOC RWY 34L

SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From QWENN or JAZZZ.
DME or RADAR required.
Simultaneous approach authorized. For inop ALS, increase S-LOC 34L Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6	127.3 379.975	

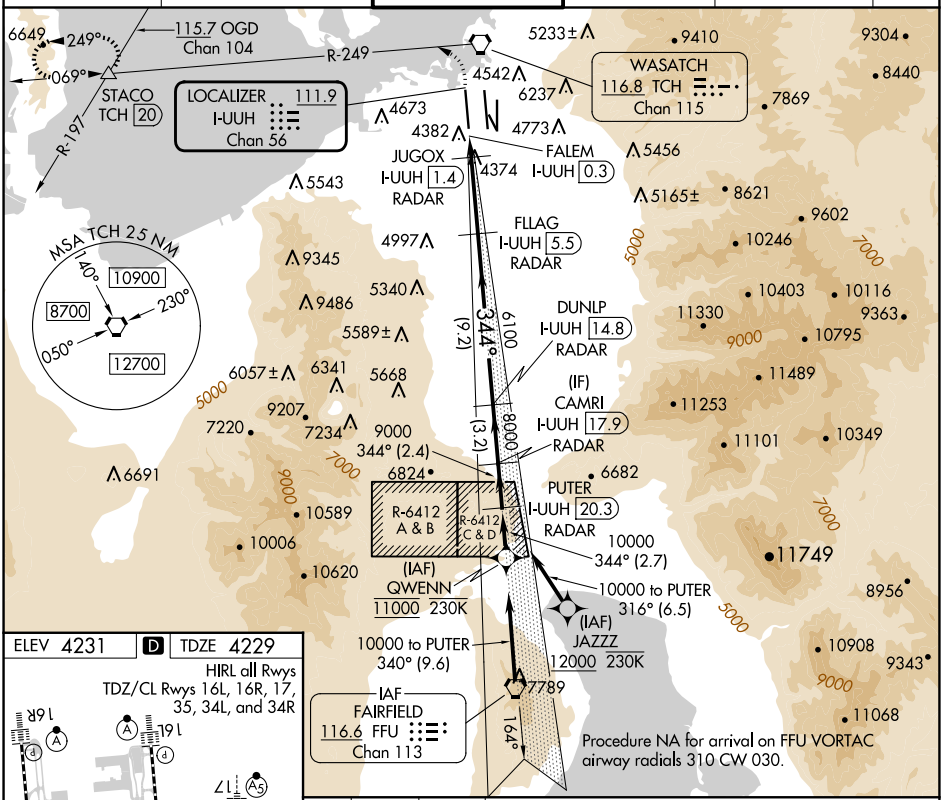

ELEV 4231 D TDZE 4229

HIRL all Rwys
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R

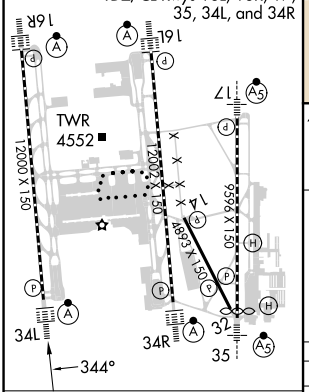

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

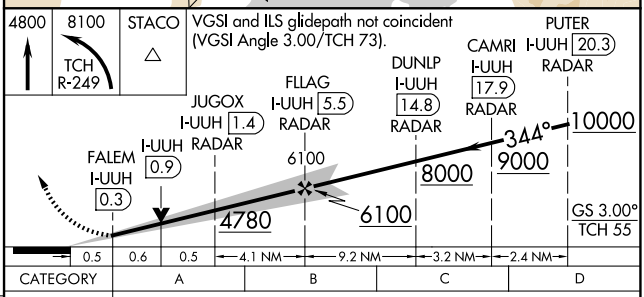

CATEGORY	A	B	C	D
S-ILS 34L	4429/18 200 (200-½)			
S-LOC 34L	4640/24 411 (500-½)		4640/40 411 (500-¾)	

SW-4, 20 FEB 2025 to 20 MAR 2025
SW-4, 20 FEB 2025 to 20 MAR 2025