

RNAV (RNP) Z RWY 16R

SALT LAKE CITY INTL (SLC)

APP CRS	Rwy Idg	12000
164°	TDZE	4226
	Apt Elev	4231

RNP AR APCH - GPS. Authorization required. From LAWVA: RF.




▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000, and increase RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 direct STACO and hold.

*Missed approach requires minimum climb of 339 feet per NM to 4680.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6	127.3 379.975	

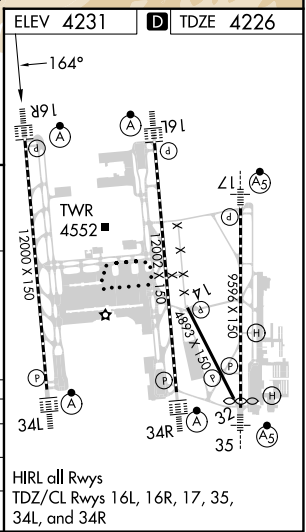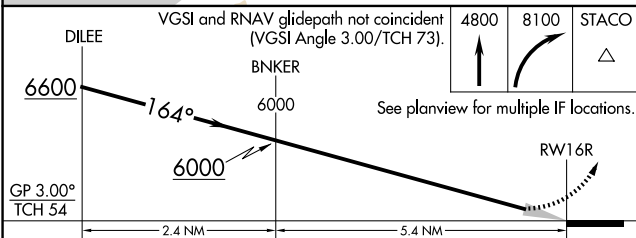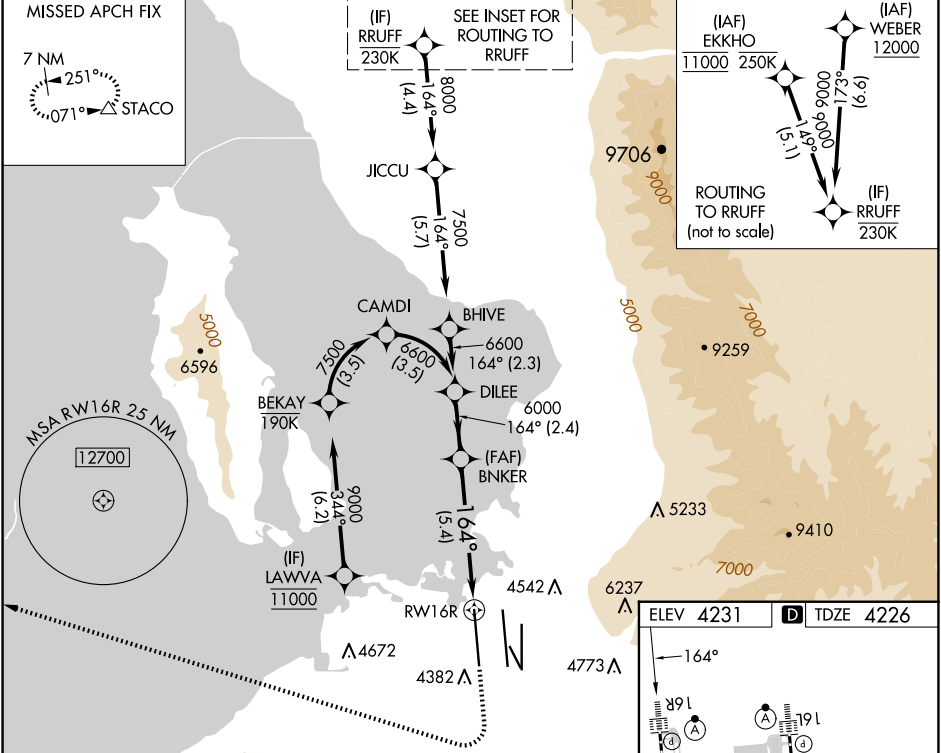

CATEGORY	A	B	C	D
RNP 0.10 DA*		4481/24	255 (300-½)	
RNP 0.30 DA		4597/35	371 (400-¾)	

AUTHORIZATION REQUIRED

SW-4, 20 FEB 2025 to 20 MAR 2025

SW-4, 20 FEB 2025 to 20 MAR 2025