

| | | | |
|-----------------------------------------------------|------------------------|-----------------------------|---------------------------------------|
| LOC/DME I-SNA 111.75 Chan 54(Y) | APP CRS 196° | Rwy Idg TDZE Apt Elev | 5700 54 56 |
|-----------------------------------------------------|------------------------|-----------------------------|---------------------------------------|

ILS or LOC RWY 20R



JOHN WAYNE/ORANGE COUNTY (SNA)

⚠ Circling Rwy 20L NA at night.
*RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 on I-SNA LOC south course (196°) to MINOE INT/I-SNA 10.9 DME.

| | | | | | | |
|------------------------|-------------------------------------|---------------------------------------------------|-------------------------|--------------------------|-------|-------------------------|
| D-ATIS 126.0 | SOCAL APP CON 121.3 263.1 | JOHN WAYNE TOWER * 126.8 (CTAF) 343.625 | GND CON 120.8 | CLNC DEL 118.0 | CPDLC | UNICOM 122.95 |
|------------------------|-------------------------------------|---------------------------------------------------|-------------------------|--------------------------|-------|-------------------------|

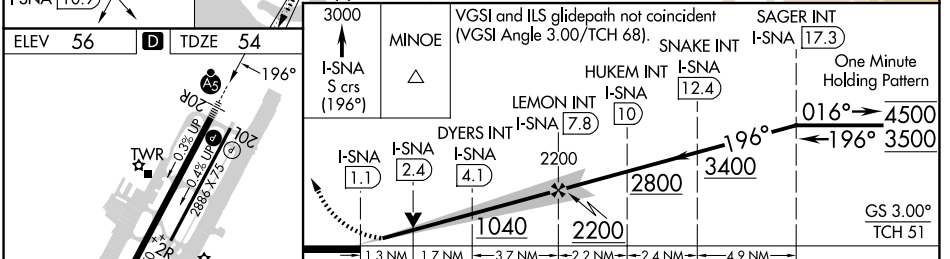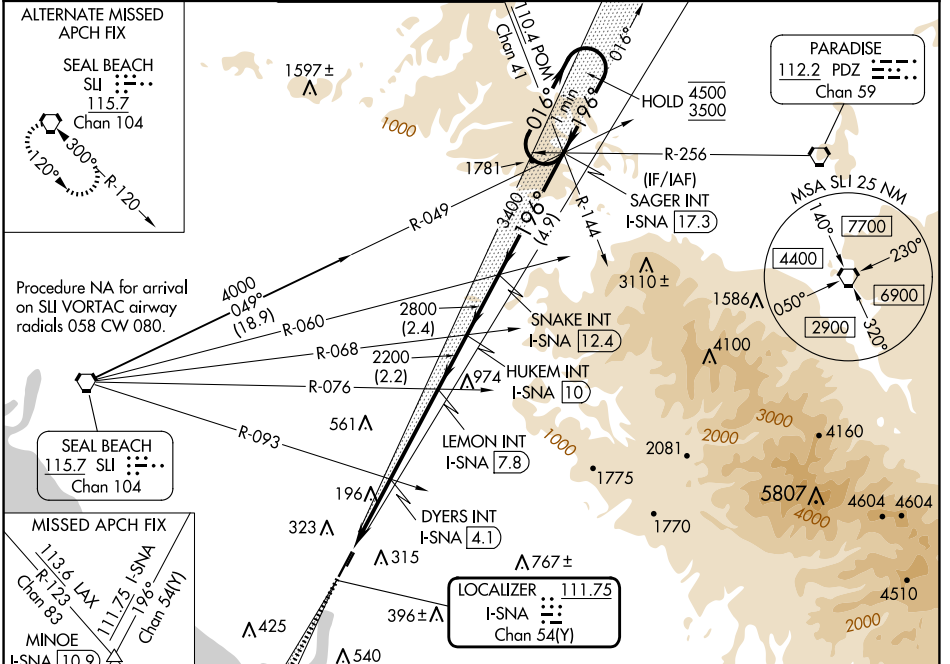

| | | | | | | | | | | |
|---------|----------|---------|---------------------------------------------------------|---------------------|------------------------------------------------------------------|----------------------------|--------------------|-------------------------|-------------------------|---|
| ELEV 56 | D | TDZE 54 | 3000 | MINOE | VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 68). | SAGER INT I-SNA 17.3 | | | | |
| | | 196° | I-SNA S crs (196°) | HUKEM INT I-SNA 10 | SNAKE INT I-SNA 12.4 | One Minute Holding Pattern | | | | |
| | | 196° | I-SNA 1.1 | LEMON INT I-SNA 7.8 | 2800 | 4500 | | | | |
| | | 196° | I-SNA 2.4 | 2200 | 3400 | 3500 | | | | |
| | | 196° | I-SNA 4.1 | 1040 | 2200 | GS 3.00° TCH 51 | | | | |
| | | 196° | 1.3 NM | 1.7 NM | 3.7 NM | 2.2 NM | 2.4 NM | 4.9 NM | | |
| | | 196° | CATEGORY | | | | A | B | C | D |
| | | 196° | S-ILS 20R* | | | | 255/24 201 (200-½) | | | |
| | | 196° | S-LOC 20R | | 1040/40 986 (1000-¾) | 1040/55 986 (1000-1) | 1040-2½ | 986 (1000-2½) | | |
| | | 196° | S-LOC 20R | | 1040-1¼ 984 (1000-1¼) | 1040-1½ 984 (1000-½) | 1040-3 | 1180-3 1124 (1200-3) | | |
| | | 196° | DYERS FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | | | | |
| | | 196° | S-LOC 20R | | 460/24 | 406 (500-½) | | 460/40 | 406 (500-¾) | |
| | | 196° | S-LOC 20R | | 640-1 | 584 (600-1) | | 840-2¼ 784 (800-2¼) | 1180-3 1124 (1200-3) | |

SW-3, 20 FEB 2025 to 20 MAR 2025

SW-3, 20 FEB 2025 to 20 MAR 2025