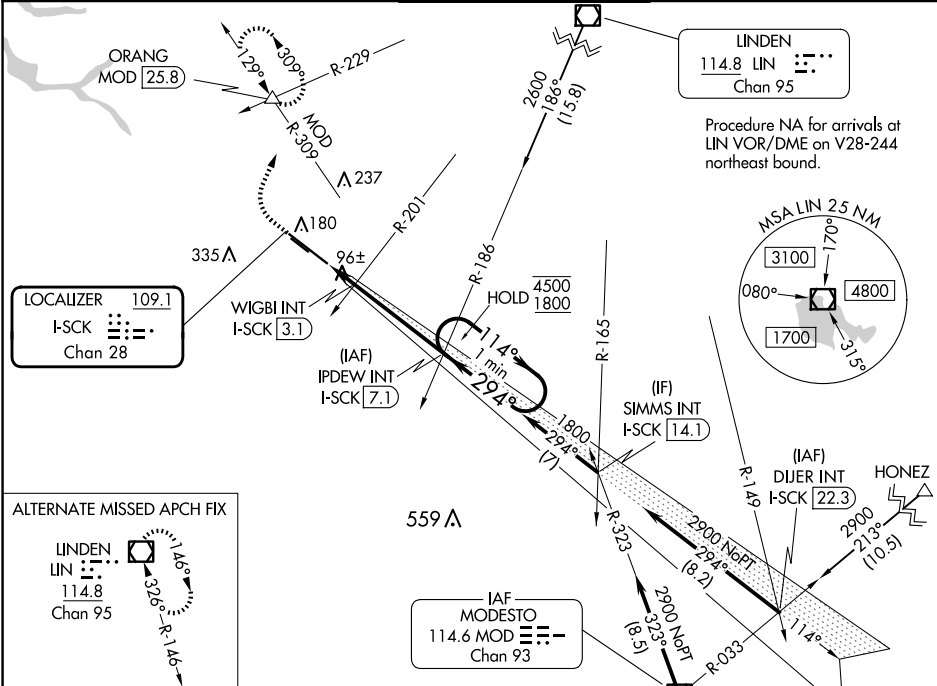


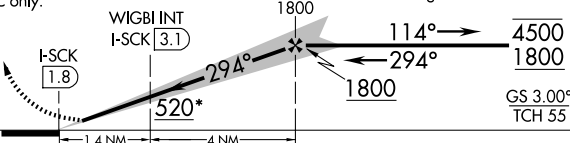
LOC/DME I-SCK 109.1 Chan 28	APP CRS 294°	Rwy Idg TDZE 32 Apt Elev 33
---	------------------------	---


ILS or LOC RWY 29R
STOCKTON METRO (SCK)

⚠ For inop ALS, increase S-LOC 29R Cat C/D visibility to 1 3/8 SM. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 010° and MOD VOR/DME R-309 to ORANG INT/MOD 25.8 DME and hold.
--	--	---

ATIS 118.25	NORCAL APP CON (SE-NW) 123.85 278.3 (N-SE) 125.1 363.2	STOCKTON TOWER ★ 120.3 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------



500	2000	MOD R-309	ORANG	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).
		hdg 010°		IPDEW INT I-SCK [7.1]
* LOC only.				
				
CATEGORY	A	B	C	D
S-ILS 29R #	232/24 200 (200-1/2)			
S-LOC 29R	520/24 488 (500-1/2)	520/50 488 (500-1)		
 CIRCLING	520-1 487 (500-1)	540-1 507 (600-1)	640-1 3/4 607 (700-1 3/4)	640-2 607 (700-2)
WIGBI FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 29R	360/24 328 (400-1/2)	360/26 328 (400-1/2)		
 CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1 3/4 607 (700-1 3/4)	640-2 607 (700-2)

ELEV 33	 TDZE 32
	
HIRL Rwy 11L-29R 	
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48

SW-2, 20 FEB 2025 to 20 MAR 2025

SW-2, 20 FEB 2025 to 20 MAR 2025