

ILS or LOC Y RWY 18L


LOC I-VAD 109.3	APCH CRS 183°	Rwy Idg TDZE Arprt Elev 9300 233 233
---------------------------	-------------------------	--

[USAF]



MOODY AFB (KVAD)

RADAR or DME required		ALS-F1 (A1)	MISSED APPROACH: Climb to 3000 on VAD TACAN R-183 to EQUIP and hold.
* When ALS inop, increase RVR to 40 and vis to 3/4 mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/8 miles.			

ATIS ★ 273.5	VALDOSTA APP CON 126.6 285.6	TOWER ★ 128.45 (CTAF) 257.625	GND CON 138.95 275.8	CLNC DEL 120.625 296.7
------------------------	--	--	--------------------------------	----------------------------------

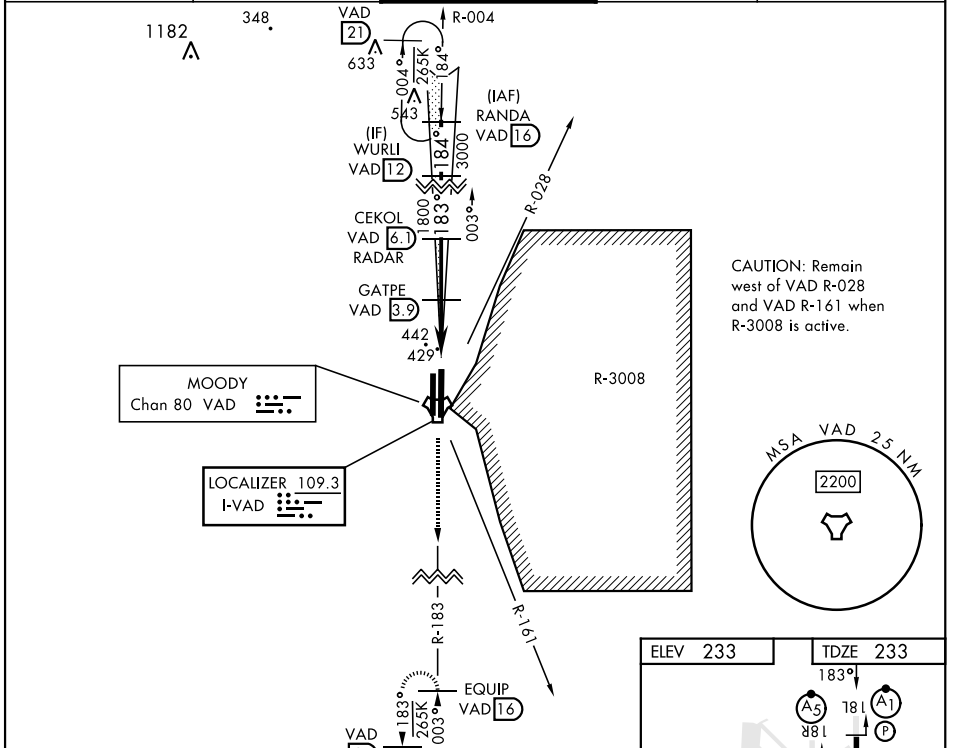

EMERG SAFE ALT 100 NM 3300

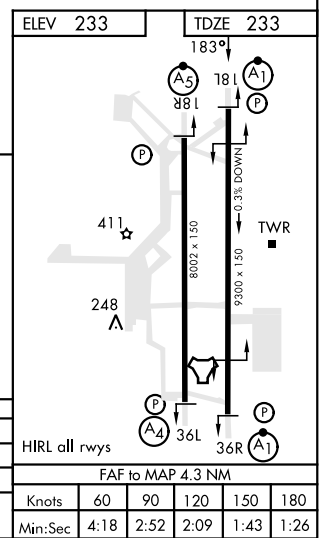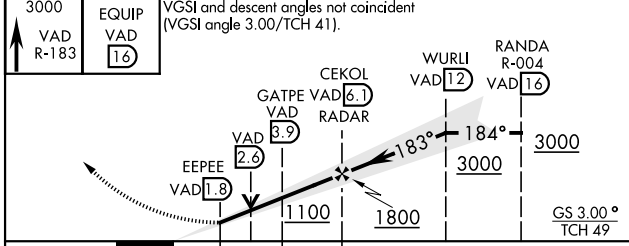

CATEGORY	A	B	C	D	E
S-ILS 18L*	433/24		200 (200-1/2)		
S-LOC 18L**	680/24	447 (500-1/2)	680/45	447 (500-3/8)	
◉ CIRCLING	760-1	527 (600-1)	760-1 1/2 527 (600-1/2)	800-2	567 (600-2)

ILS or LOC Y RWY 18L

SE-4, 20 FEB 2025 to 20 MAR 2025

SE-4, 20 FEB 2025 to 20 MAR 2025