

WALLA WALLA TWO DEPARTURE

AL-440 (FAA)

WALLA WALLA RGNL (ALW)
WALLA WALLA, WASHINGTON

SPOKANE APP CON ★
133.15 379.15


RADAR required.

**TOP ALTITUDE:
Assigned by ATC**

TAKEOFF MINIMUMS

Rwy 20: Standard.

Rwy 2: 300-1 $\frac{5}{8}$ with minimum climb of 236' per NM to 2300 or standard with minimum climb of 374' per NM climb gradient to 1600.

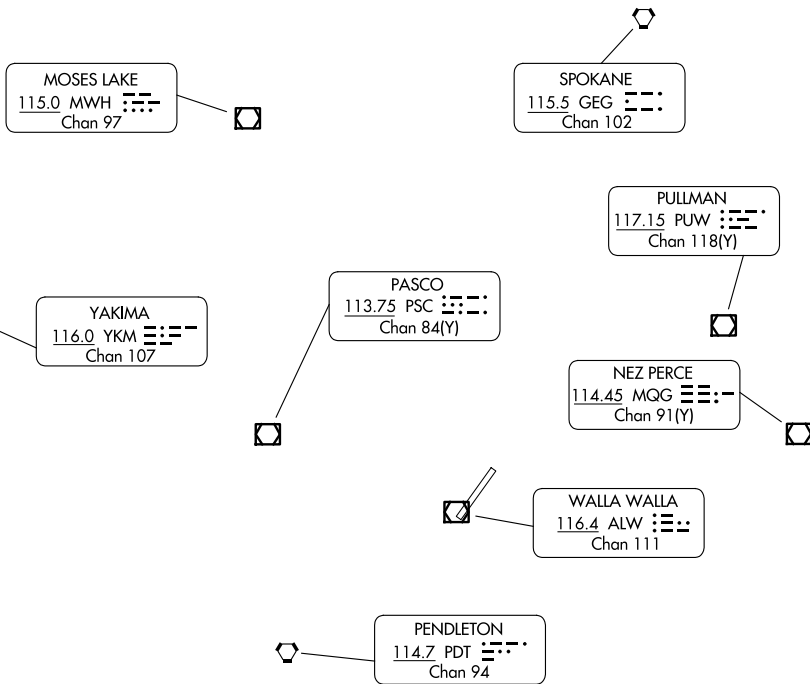

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2, 20: Climb on assigned turn and heading for vector to assigned route.

LOST COMMUNICATIONS: If not in contact with Departure Control after reaching 2500 continue climb to assigned altitude and proceed direct to ALW VOR/DME, thence on assigned route.

NOTE: Air Traffic Control may assign turns and magnetic heading of 202° clockwise through 022° in the initial clearance.

WALLA WALLA TWO DEPARTURE

WALLA WALLA, WASHINGTON
WALLA WALLA RGNL (ALW)

NW-1, 20 FEB 2025 to 20 MAR 2025

NW-1, 20 FEB 2025 to 20 MAR 2025