

LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Idg TDZE Apt Elev	8021 422 422
---	------------------------	-----------------------------	---

ILS or LOC RWY 22



EVANSVILLE RGNL (E.VV)

RADAR or DME required for procedure entry at AUGUS.


ASR Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1 $\frac{3}{4}$ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or Huts C and D.

MALSRS MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 126.6	UNICOM 122.95
----------------------	--	---	-------------------------	--------------------------	-------------------------

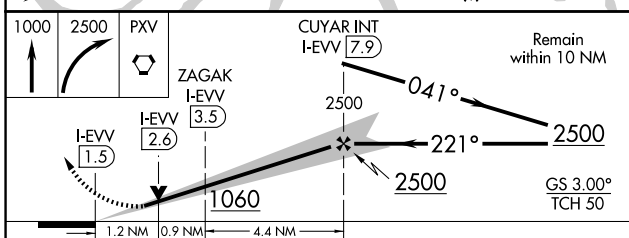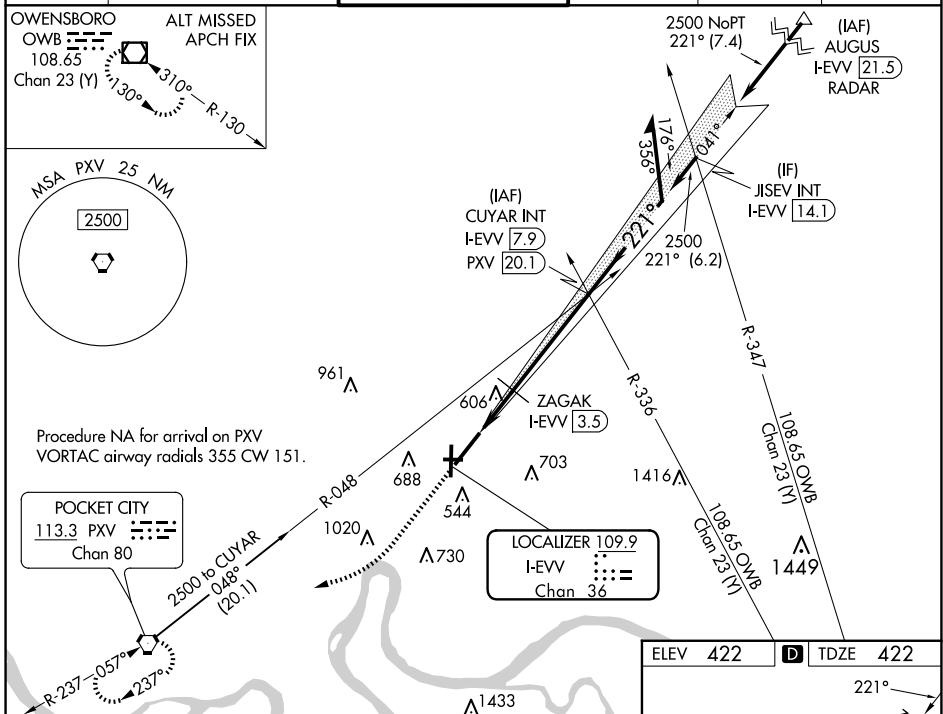

CATEGORY	A	B	C	D
S-ILS 22*	622/24		200 (200- $\frac{1}{2}$)	
S-LOC 22	1060/24	638 (700- $\frac{1}{2}$)	1060-1 $\frac{3}{8}$	638 (700-1 $\frac{3}{8}$)
C CIRCLING	1060-1	638 (700-1)	1060-1 $\frac{3}{4}$ 638 (700-1 $\frac{3}{4}$)	1060-2 638 (700-2)
ZAGAK FIX MINIMUMS (DME REQUIRED)				
S-LOC 22	840/24	418 (500- $\frac{1}{2}$)	840/40	418 (500- $\frac{3}{4}$)
C CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1 $\frac{3}{4}$ 618 (700-1 $\frac{3}{4}$)	1040-2 618 (700-2)

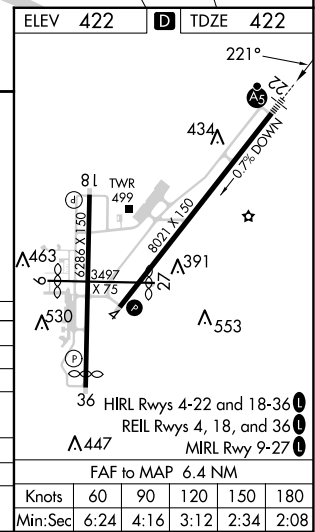

EC-2, 20 FEB 2025 to 20 MAR 2025

EC-2, 20 FEB 2025 to 20 MAR 2025