RNAV (GPS) RWY 13

ABRAHAM LINCOLN CAPITAL (SPI)

WAAS	APP CRS		
CH **99616**	**128°**	Rwy Idg	**7217**
W13A		TDZE	**592**
		Apt Elev	**598**

RNP APCH - GPS.

T A ASR Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting: increase LPV DA to 932 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1068 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. Rwy 13 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3100 direct CONOX and hold.

ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) L 257.8	121.9 348.6	121.7	122.95

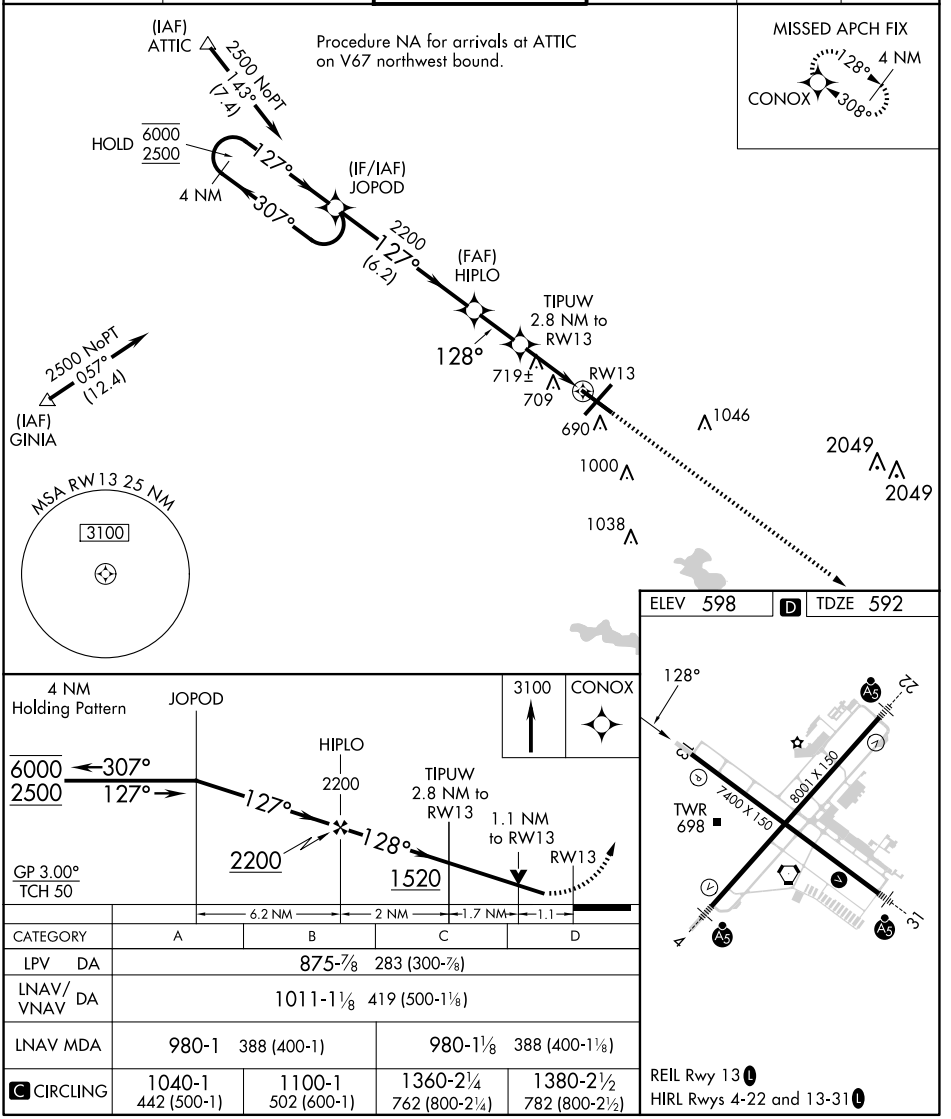

CATEGORY	A	B	C	D
LPV DA	875-⅞ 283 (300-⅞)			
LNAV/VNAV DA	1011-1⅛ 419 (500-1⅛)			
LNAV MDA	980-1 388 (400-1)		980-1⅛ 388 (400-1⅛)	
C CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

REIL Rwy 13 L
HIRL Rwys 4-22 and 13-31 L

EC-3, 20 FEB 2025 to 20 MAR 2025
EC-3, 20 FEB 2025 to 20 MAR 2025