

WAAS CH 69216 W30A	APP CRS 300°	Rwy Idg TDZE Apt Elev	6751 12 15
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 30
JACK BROOKS RGNL (BPT)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Rwy 30 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Orange County altimeter setting. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 294 feet and all visibilities ¾ SM. Increase LNAV visibility Cat C/D/E ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D/E ¼ SM.

MISSED APPROACH:
Climb to 3100 direct
GIDDY and hold,
continue climb-in-hold
to 3100.

ATIS 126.3	HOUSTON APP CON 121.3 377.1	BEAUMONT TOWER ★ 119.5 (CTAF) 0	GND CON 124.85	CLNC DEL 118.3	UNICOM 122.95
----------------------	---------------------------------------	---	--------------------------	--------------------------	-------------------------

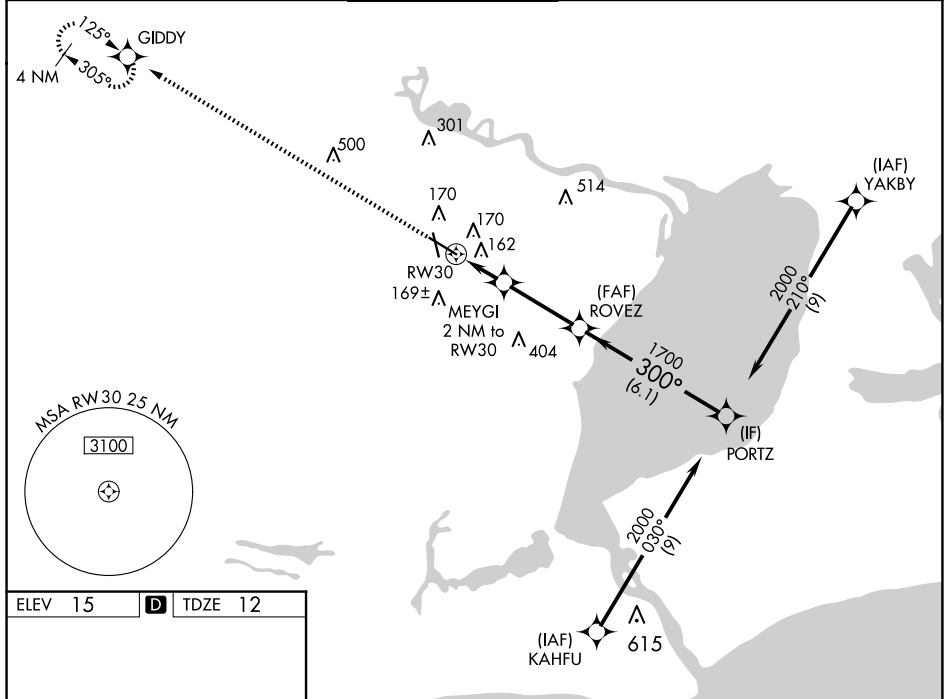

REIL Rws 16, 30 and 34 **L**
HIRL Rws 12-30, 16-34 **L**

3100 ↑	GIDDY ✦					
CATEGORY		A	B	C	D	E
LPV DA		262 ⁻³ / ₄		250 (300 ⁻³ / ₄)		
RNAV/ VNAV	DA	323 ⁻⁷ / ₈		311 (400 ⁻⁷ / ₈)		
RNAV MDA		420-1	408 (500-1)	420-1 ¹ / ₈		408 (500-1 ¹ / ₈)