

LOC/DME I-JQX 108.9 Chan 26	APP CRS 178°	Rwy Idg 6499 TDZE 965 Apt Elev 978
---	------------------------	---

ILS or LOC RWY 18

JOPLIN RGNL (JLN)



ADF required. DME required for LOC only. RADAR required for procedure entry.

⚠ For inop ALS, increase S-ILS 18# all Cats visibility to RVR 4500 and S-LOC 18 Cat C/D visibility to RVR 5500.

MALS

MISSED APPROACH: Climb to 1460 then climbing right turn to 3100 on LUNNS LOM bearing 177° to LUNNS LOM and hold, continue climb-in-hold to 3100. S-ILS 18* missed approach requires minimum climb of 204 feet per NM to 2240. (If unable to meet climb gradient use S-ILS 18# minimums).

ATIS 120.85	KANSAS CITY CENTER 128.6 282.325	JOPLIN TOWER* 119.8 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

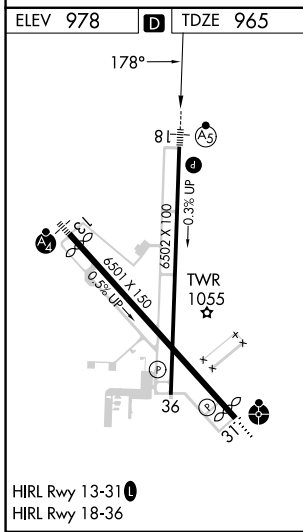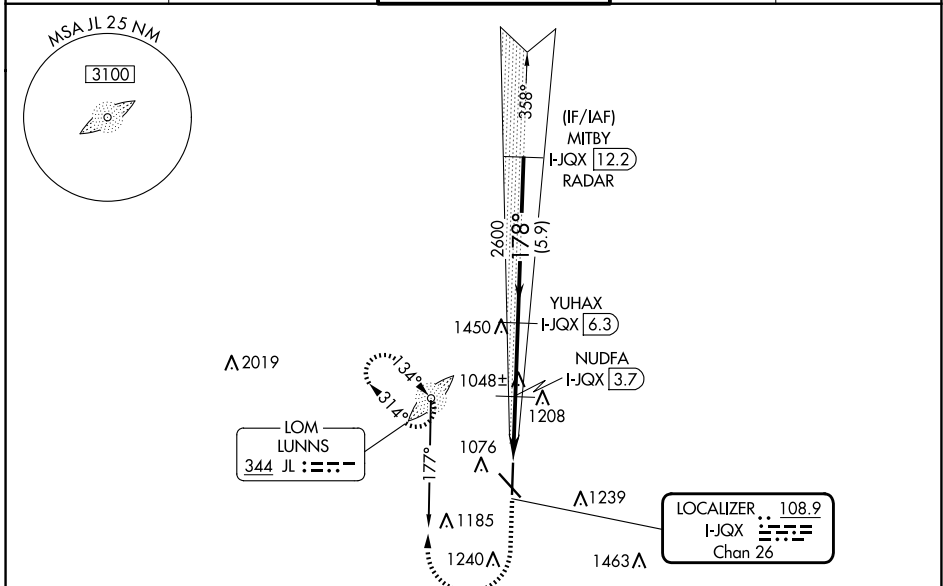

ELEV 978	D	TDZE 965	
1460	3100	JL	
GS 3.00°	TCH 46		
CATEGORY	A	B C D	
S-ILS 18*	1165/24 200 (200-1/2)		
S-ILS 18#	1240/24 275 (300-1/2)		
S-LOC 18	1340/24 375 (400-1/2)	1340/35 375 (400-5/8)	
C CIRCLING	1420-1 442 (500-1)	1480-1 502 (600-1)	1540-1 3/4 562 (600-1 3/4) 1600-2 622 (700-2)

NC-3, 20 FEB 2025 to 20 MAR 2025

NC-3, 20 FEB 2025 to 20 MAR 2025