


RNAV (RNP) Z RWY 27

KANSAS CITY INTL (MCI)


APP CRS	Rwy Idg	9501
274°	TDZE	1027
	Apt Elev	1027

RADAR required for procedure entry. RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to 1 3/8 SM.


MALSR  MISSED APPROACH: Climb to 4000 on track 274° to WOOKIE and on track 325° to BOWL and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

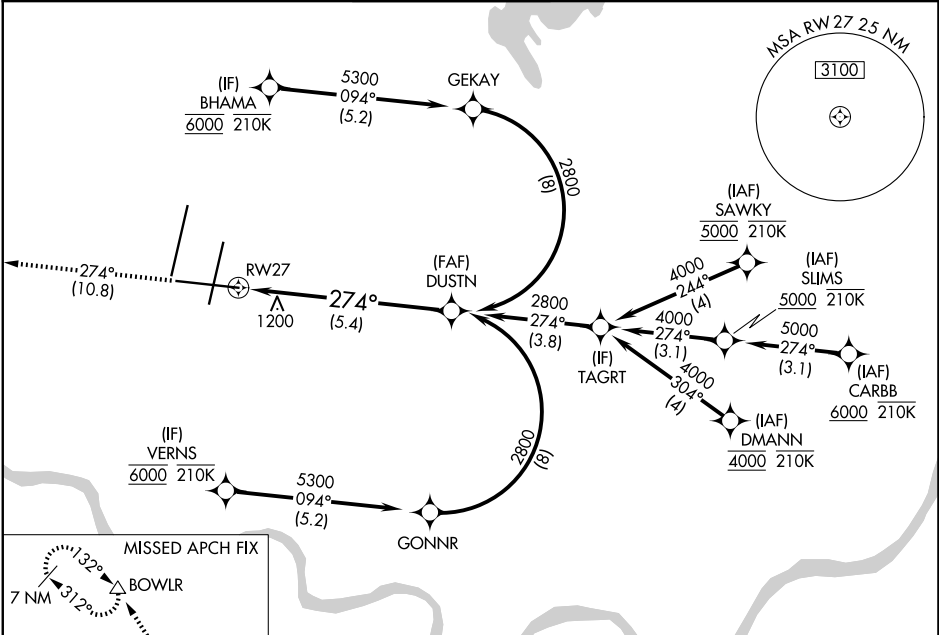

NC-3, 20 FEB 2025 to 20 MAR 2025

NC-3, 20 FEB 2025 to 20 MAR 2025



4000	WOOKE	tr 274°	tr 325°	BOWL
------	-------	---------	---------	------


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.15 DA		1371/30	344 (400-%)	
RNP 0.30 DA		1506/50	479 (500-1)	

AUTHORIZATION REQUIRED

ELEV 1027	TDZE 1027
-----------	-----------

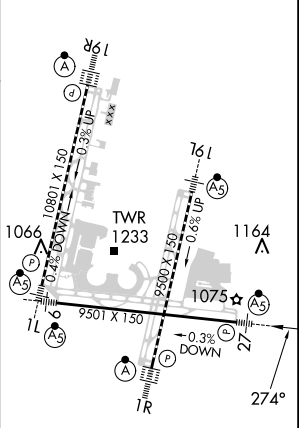

HIRL all Rwys
TDZ/CL Rwys 1L, 1R, 19R and 19L