


| | | |
|-------------|----------|--------------|
| APP CRS | Rwy Idg | 11014 |
| 063° | TDZE | 256 |
| | Apt Elev | 305 |

RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

| | | | |
|---|--|-----------|--|
| RNP AR APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP *0.30 all Cats visibility to ¾ SM and RNP 0.30 all Cats visibility to 1½ SM. *Missed approach requires a minimum climb of 276 feet per NM to 1400. | | MALSR | MISSED APPROACH: Climb to 3000 via track 063° to WABOX and hold. |
|---|--|-----------|--|

| | | | | |
|----------------------|----------------------------------|-----------------------------------|-------------------------------|--------------------------|
| ATIS 119.0 | GUAM CERAP 119.8 269.0 | AGANA TOWER 118.1 340.2 | GND CON 121.9 336.4 | CLNC DEL 121.9 |
|----------------------|----------------------------------|-----------------------------------|-------------------------------|--------------------------|

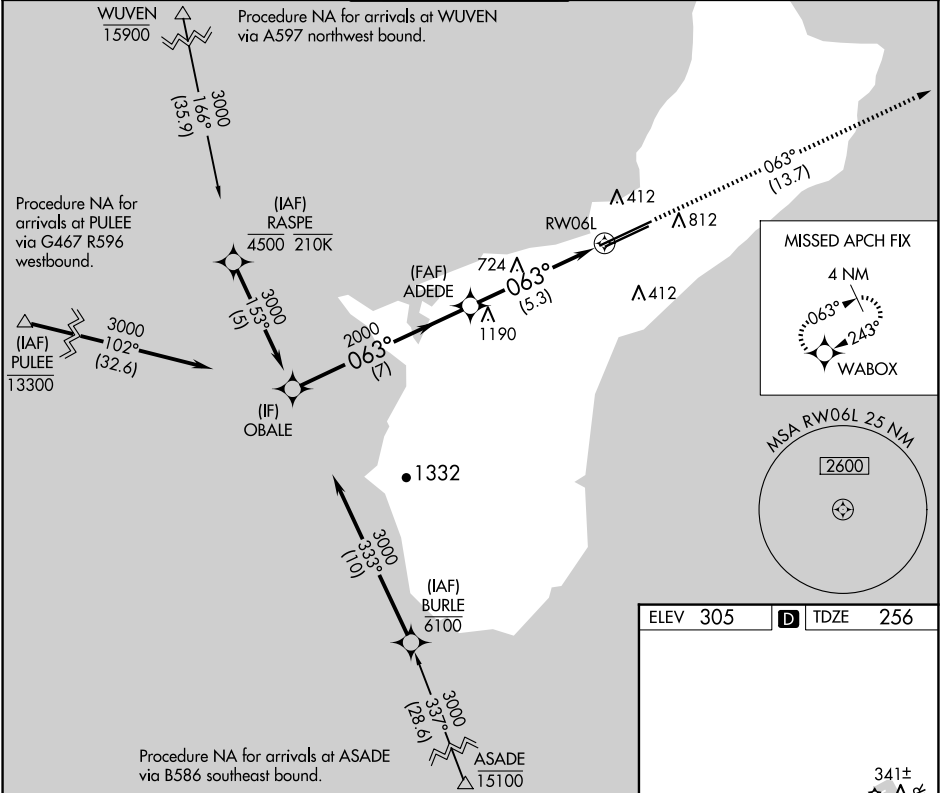

| | | | | | |
|-------------------|--------|---|-------------|------|-------|
| Procedure Turn NA | OBACLE | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73) | | 3000 | WABOX |
| | 3000 | 063° | ADEDE | 2000 | |
| GP 3.00° TCH 50 | | | 2000 | | |
| | 7 NM | | 5.3 NM | | |
| CATEGORY | A | B | C | D | |
| RNP 0.30* DA | | 514-½ | 258 (300-½) | | |
| RNP 0.30 DA | | 656-⅝ | 400 (400-⅝) | | |

AUTHORIZATION REQUIRED

HIRL all Rwys