


RNAV (RNP) Z RWY 36

CORPUS CHRISTI INTL (CRP)

| | | |
|------------------------|-----------------------------|---------------------------------------|
| APP CRS 355° | Rwy Idg TDZE Apt Elev | 6080 40 44 |
|------------------------|-----------------------------|---------------------------------------|




▽ For uncompensated Baro-VNAV systems, procedure NA below -1°C (-31°F) or above 54°C (130°F). GPS required. For inop MALSR, increase RNP 0.11 visibility all Cats to RVR 4000. For inop MALSR, increase RNP 0.30 visibility all Cats to RVR 5900.

MALSR



MISSED APPROACH: Climb to 2000 on track 355° to EXIKE and on track 294° to ATHIS and hold.

| | | | | |
|-----------------------------|---|---|---------------------------------------|----------------------------------|
| ATIS 126.8 | CORPUS APP CON 120.9 348.725 | CORPUS TOWER 119.4 257.8 | GND CON 121.9 269.15 | CLNC DEL 118.55 |
|-----------------------------|---|---|---------------------------------------|----------------------------------|

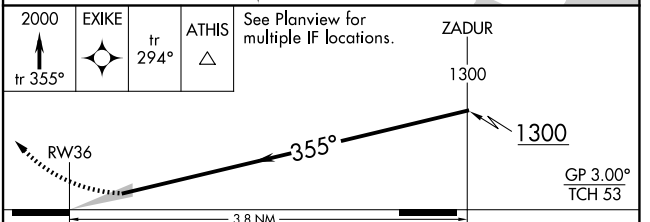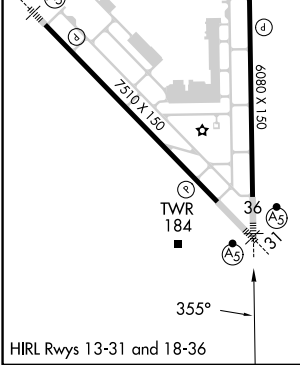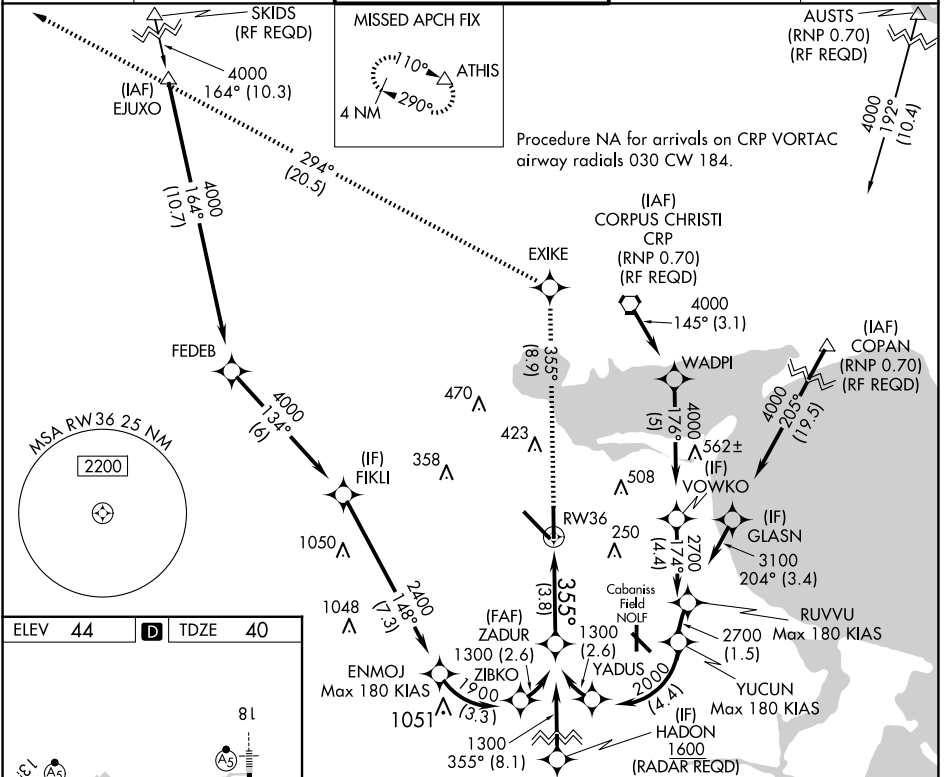

| CATEGORY | A | B | C | D |
|-------------|---|--------|-------------|---|
| RNP 0.11 DA | | 290/24 | 250 (300-½) | |
| RNP 0.30 DA | | 400/34 | 360 (400-½) | |

AUTHORIZATION REQUIRED

SC-3, 20 FEB 2025 to 20 MAR 2025

SC-3, 20 FEB 2025 to 20 MAR 2025