

|  |                        |   |             |
|--|------------------------|---|-------------|
| WAAS<br>CH <b>97515</b><br><b>W13A</b> | APP CRS<br><b>132°</b> | Rwy Idg<br>TDZE <b>46</b><br>Apt Elev <b>46</b> | <b>7510</b> |
|--|------------------------|---|-------------|

# RNAV (GPS) Y RWY 13

CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C, D, and E visibility to RVR 5500. \*RVR 1800 authorized with use of FD or AP or HUD to DA.

MAISR




MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct SOLON and hold.

|                      |  |                                    |                                |                           |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|
| ATIS<br><b>126.8</b> | CORPUS APP CON<br><b>120.9 348.725</b> | CORPUS TOWER<br><b>119.4 257.8</b> | GND CON<br><b>121.9 269.15</b> | CLNC DEL<br><b>118.55</b> |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|

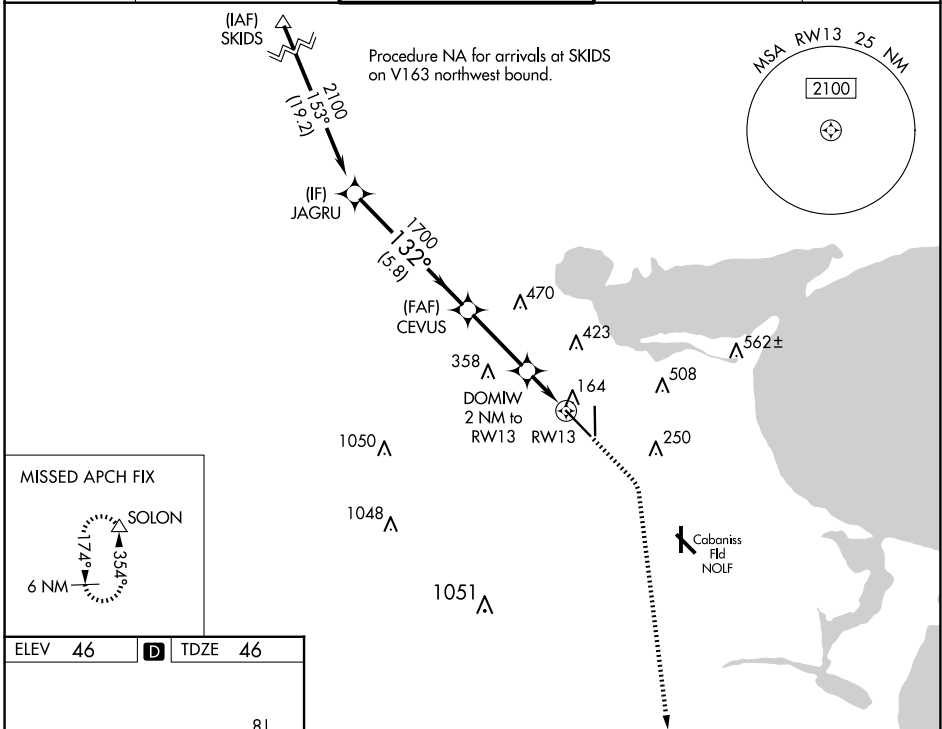

|         |          |         |
|---------|----------|---------|
| ELEV 46 | <b>D</b> | TDZE 46 |
|---------|----------|---------|

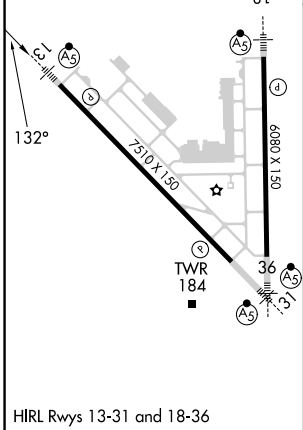

|                   |                      |                      |                        |                        |                        |
|-------------------|----------------------|----------------------|------------------------|------------------------|------------------------|
|                   | JAGRU                | CEVUS                | DOMIW 2 NM to RWY 13   | 1 NM to RWY 13         | RWY 13                 |
|                   | 2100                 | 1700                 | 720                    |                        |                        |
|                   | 132°                 |                      |                        |                        |                        |
|                   | 5.8 NM               | 3 NM                 | 1 NM                   | 1 NM                   |                        |
| CATEGORY          | A                    | B                    | C                      | D                      | E                      |
| LPV DA *          | 246/24               |                      | 200 (200-½)            |                        |                        |
| LNAV/VNAV DA      | 325/24               |                      | 279 (300-½)            |                        |                        |
| LNAV MDA          | 420/24 374 (400-½)   |                      | 420/35 374 (400-¾)     |                        |                        |
| <b>C</b> CIRCLING | 500-1<br>454 (500-1) | 780-1<br>734 (800-1) | 820-2¼<br>774 (800-2¼) | 820-2½<br>774 (800-2½) | 820-2¾<br>774 (800-2¾) |