


WAAS CH <b>60900</b> <b>W36A</b>	APP CRS <b>004°</b>	Rwy Idg <b>7000</b> TDZE <b>62</b> Apt Elev <b>83</b>
--	------------------------	---

# RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. ▲ For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.
---	-------------	---



ATIS <b>119.45 239.25</b>	TALLAHASSEE APP CON * <b>135.8 317.4</b>	TALLAHASSEE TOWER * <b>118.7 (CTAF) 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>126.65 275.8</b>	UNICOM <b>123.075</b>
------------------------------	---	--	-------------------------------	---------------------------------	--------------------------

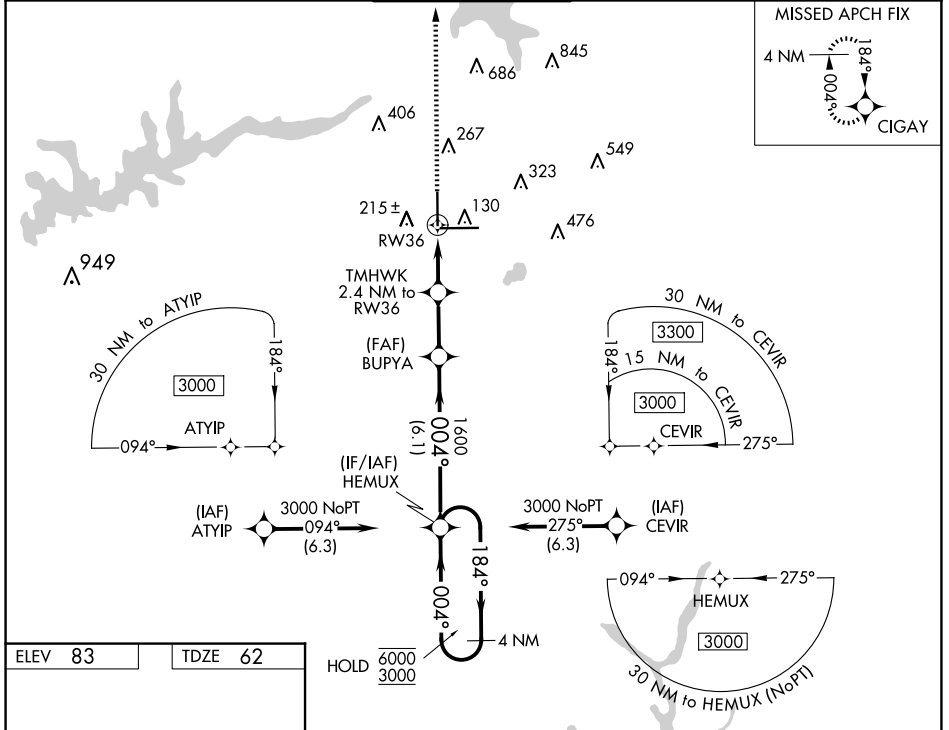

SE-3, 20 FEB 2025 to 20 MAR 2025

SE-3, 20 FEB 2025 to 20 MAR 2025

ELEV 83	TDZE 62
---------	---------

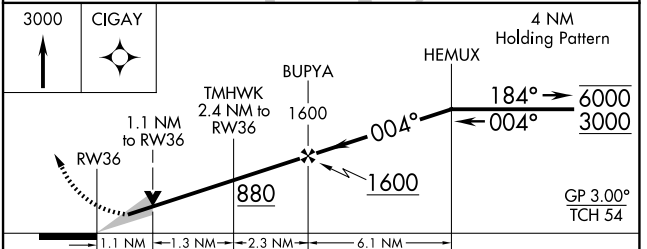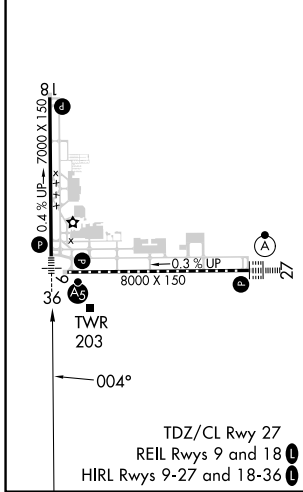

CATEGORY	A	B	C	D
LPV DA *		262/24	200 (200-½)	
LNAV/VNAV DA		364/24	302 (300-½)	
LNAV MDA	460/24	398 (400-½)	460/35	398 (400-½)
<input checked="" type="checkbox"/> CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-½)	800-2¼ 717 (800-2¼)