



**TOP ALTITUDE:  
ASSIGNED BY ATC**

RNAV 1 - DME/DME/IRU or GPS.  
RADAR required.

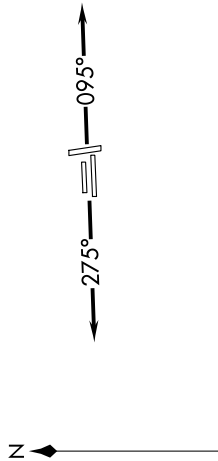


NOTE: Jet departures at/above 10000,  
maintain 280K until advised by ATC.

- ATIS 125.025
- CLNC DEL 118.25
- GND CON 121.9
- PONTIAC TOWER \* 120.5 (CTAF)
- DETROIT DEP CON 132.35 284.0

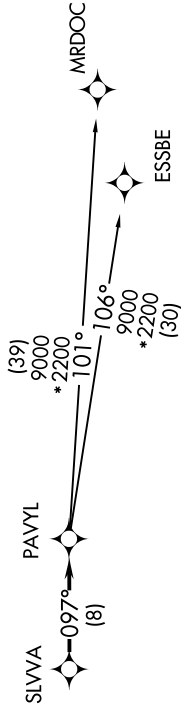

**TAKEOFF MINIMUMS:**  
Rwys 18, 36: NA - Environmental.  
Rwys 9L/R, 27L/R: Standard.



NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

TAKEOFF RUNWAYS 9L/R: Climb on heading 095° or as assigned by ATC, thence....  
TAKEOFF RUNWAYS 27L/R: Climb on heading 275° or as assigned by ATC, thence....

....for RADAR vectors to SLVVA, then on track 097° to PAVYL, then on (transition). Maintain 17000 or as assigned by ATC, expect filed altitude 10 minutes after departure.

ESSBE TRANSITION (PAVYL3.ESSBE):  
MRDOC TRANSITION (PAVYL3.MRDOC):