


LOC/DME I-ROF 111.15 Chan 48 (Y)	APP CRS 328°	Rwy Idg TDZE Apt Elev 5503 705 712
--	------------------------	--

LOC RWY 33

AURORA MUNI (A.R.R.)



<p>▽ For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¼ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.</p>	<p>MALSR </p> <p>MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.</p>				
<p>ATIS 125.85</p>	<p>CHICAGO APP CON 133.5 349.0</p>	<p>AURORA TOWER* 120.6 (CTAF) 0</p>	<p>GND CON 121.7</p>	<p>CLNC DEL 121.7 (When tower closed)</p>	<p>UNICOM 122.95 123.5</p>

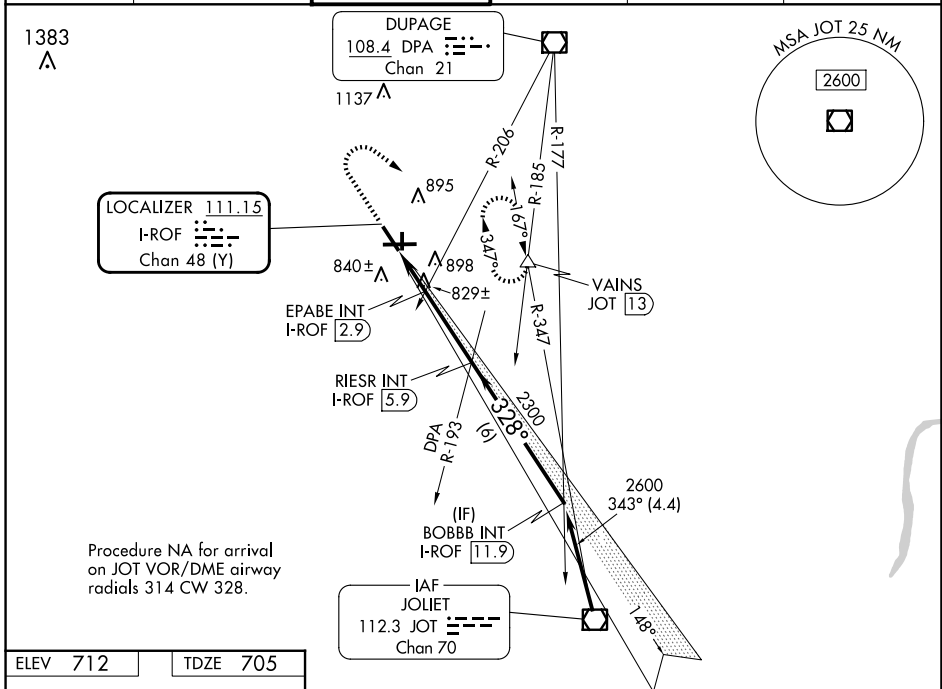

EC-3, 20 FEB 2025 to 20 MAR 2025

EC-3, 20 FEB 2025 to 20 MAR 2025

ELEV 712	TDZE 705
----------	----------

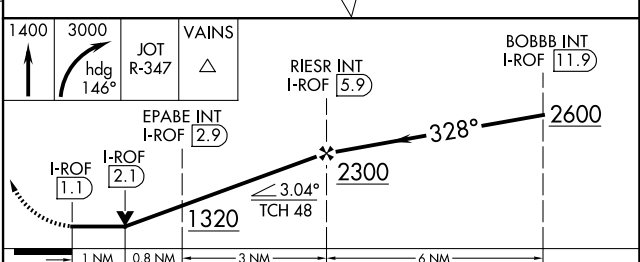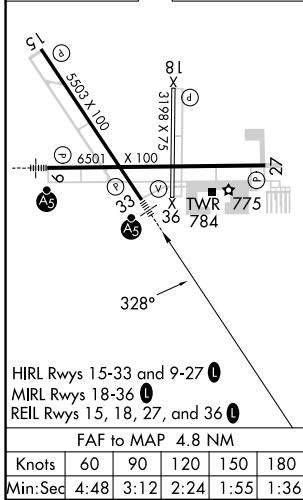

CATEGORY	A	B	C	D
S-LOC 33	1320-½	615 (700-½)	1320-1¾	615 (700-1¾)
C CIRCLING	1320-1	608 (700-1)	1320-1¾ 608 (700-1¾)	1320-2 608 (700-2)
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 33	1080-½	375 (400-½)	1080-⅝	375 (400-⅝)
C CIRCLING	1200-1	488 (500-1)	1300-1½ 588 (600-1½)	1320-2 608 (700-2)