

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>Ch <b>40317</b><br><b>W10A</b> | APP CRS<br><b>097°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>14</b><br><b>20</b> |
|--|------------------------|-----------------------------|---------------------------------------|



# RNAV (GPS) RWY 10

MIDDLE PENINSULA RGNL (F'YJ)


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Newport News altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Newport News altimeter setting: increase LPV DA to 329 feet; increase LNAV/VNAV DA to 420 feet and Cats A/B visibility ¼ SM; increase all MDA 80 feet.

**MISSED APPROACH:** Climb to 2000 direct CIBAC and on track 147° to JUDLU and hold.

|                          |   |                                 |
|--------------------------|---|---------------------------------|
| AWOS-3<br><b>132.825</b> | POTOMAC APP CON<br><b>126.4 282.375</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|---|---------------------------------|

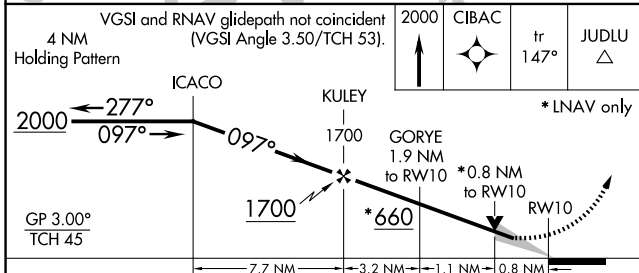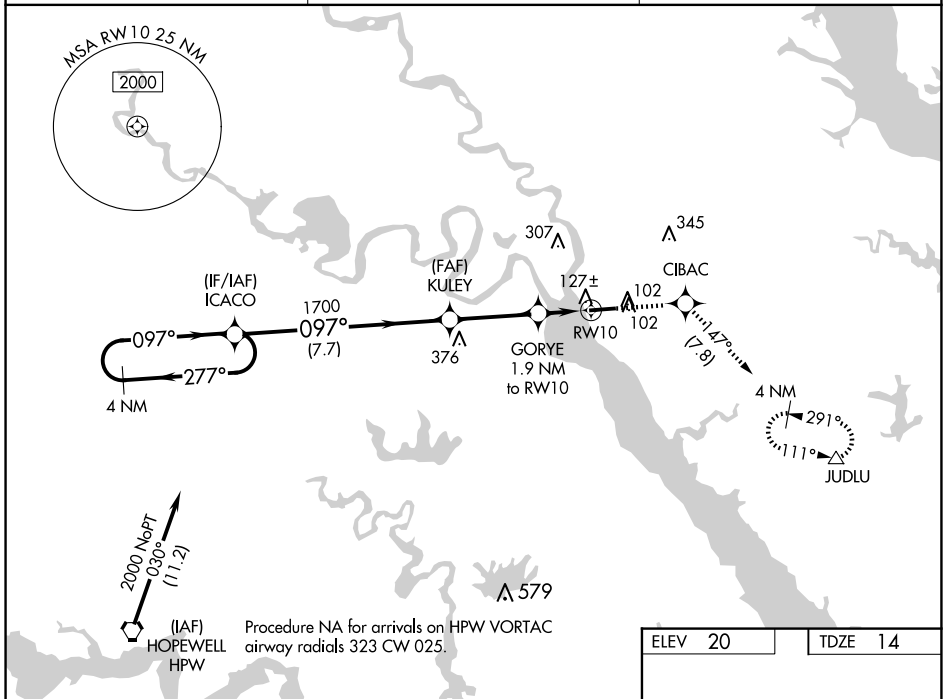

|         |         |
|---------|---------|
| ELEV 20 | TDZE 14 |
|---------|---------|



| CATEGORY          | A                    | B                    | C | D  |
|-------------------|----------------------|----------------------|---|----|
| LPV DA            | 264-1                | 250 (300-1)          |   | NA |
| LNAV/VNAV DA      | 355-1¼               | 341 (400-1¼)         |   | NA |
| LNAV MDA          | 380-1                | 366 (400-1)          |   | NA |
| <b>C</b> CIRCLING | 480-1<br>460 (500-1) | 620-1<br>600 (600-1) |   | NA |

MIRL Rwy 10-28 **0**  
REIL Rwy 10 and 28 **0**

NE-3, 20 FEB 2025 to 20 MAR 2025

NE-3, 20 FEB 2025 to 20 MAR 2025