


APP CRS <b>354°</b>	Rwy Idg TDZE Apt Elev	<b>6500</b> <b>544</b> <b>544</b>
------------------------	-----------------------------	---



# RNAV (GPS) RWY 35

ST LOUIS RGNL (ALN)

RNP APCH.				CLNC DEL <b>120.2</b> (when tower closed)		UNICOM <b>122.95</b>	
<p><b>▼</b> Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Infil altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility 1/8 SM and Circling Cat C/D visibility 1/4 SM. When VGSi inop, straight-in/ Circling Rwy 35 procedure and Circling Rwy 17 NA at night.</p>				<p>MISSED APPROACH: Climb to 2200 direct JETIK and hold.</p>			
ATIS <b>128.0</b>	ST LOUIS APP CON <b>124.2 353.9</b>	REGIONAL TOWER * <b>126.0</b> (CTAF) <b>0 239.0</b>	GND CON <b>120.2</b>				

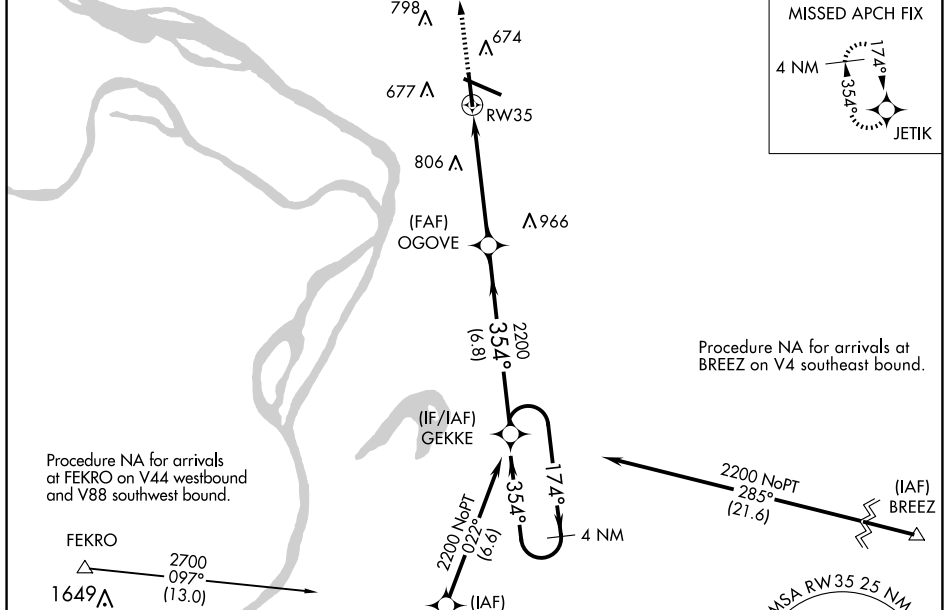

ELEV 544	<b>D</b>	TDZE 544
----------	----------	----------

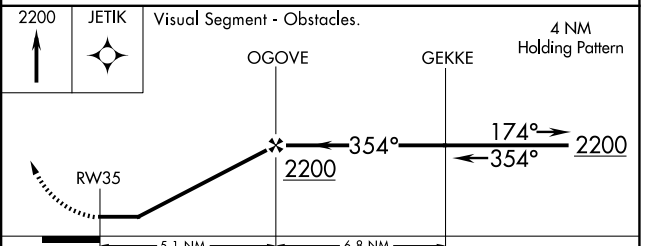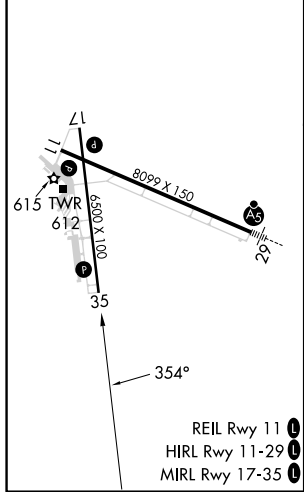

CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1 3/8	476 (500-1 3/8)
CIRCLING	1020-1	476 (500-1)	1160-1 3/4	1200-2
			616 (700-1 3/4)	656 (600-2)

EC-3, 20 FEB 2025 to 20 MAR 2025

EC-3, 20 FEB 2025 to 20 MAR 2025