

APP CRS	Rwy Idg	4855
179°	TDZE	912
	Apt Elev	912

RNAV (GPS) RWY 18


ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

RNP APCH - GPS.

When local altimeter setting not received, use Crystal altimeter setting and increase all MDA 40 feet and Circling Cat D visibility ¼ SM. VDP NA when using Crystal altimeter setting.

MISSED APPROACH: Climbing left turn to 2600 direct RUNRR and hold.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER*	GND CON	CLNC DEL	CLNC DEL	UNICOM
120.625	126.5 335.65	132.4 (CTAF)	121.85	121.3	121.85 (When twr closed)	122.95

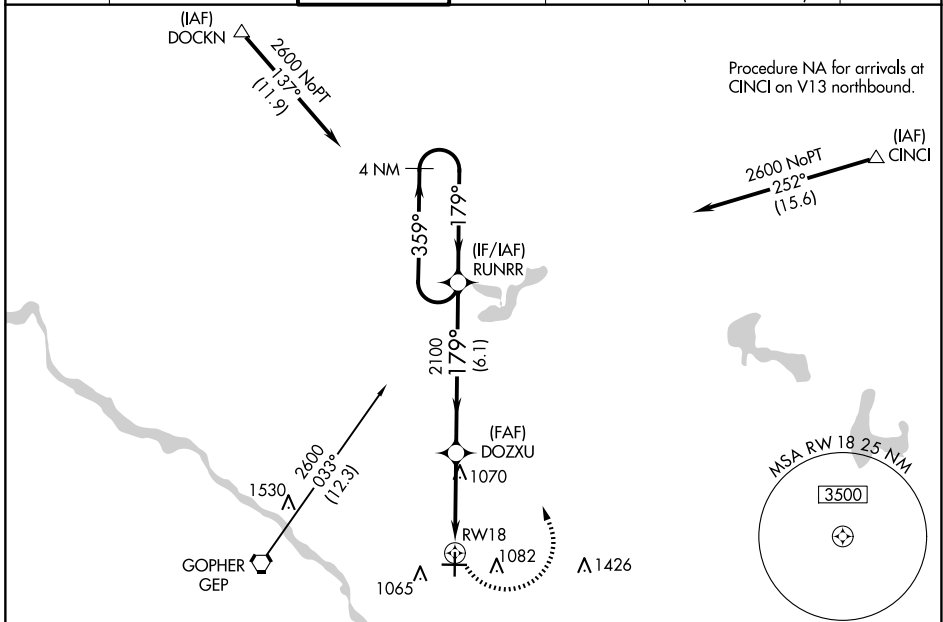

ELEV 912	TDZE 912
----------	----------

HIRL Rwy 9-27 (L)
MIRL Rwy 18-36 (L)
REIL Rws 9, 18 and 36 (L)

2600	RUNRR			
		DOZ XU	RUNRR	4 NM Holding Pattern
	1.3 NM to RW18		359°	2600
	1.3 NM	2.3 NM	6.1 NM	

CATEGORY	A	B	C	D
LNVA MDA	1380-1 468 (500-1)		1380-1 3/8 468 (500-1 3/8)	
CIRCLING	1400-1 488 (500-1)		1460-1 1/2 548 (600-1 1/2)	1580-2 668 (700-2)

NC-1, 20 FEB 2025 to 20 MAR 2025

NC-1, 20 FEB 2025 to 20 MAR 2025