

WAAS CH 77900 W13A	APP CRS 130°	Rwy Idg TDZE Apt Elev	6701 1301 1304
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

MITCHELL MUNI (MHE)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting.
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

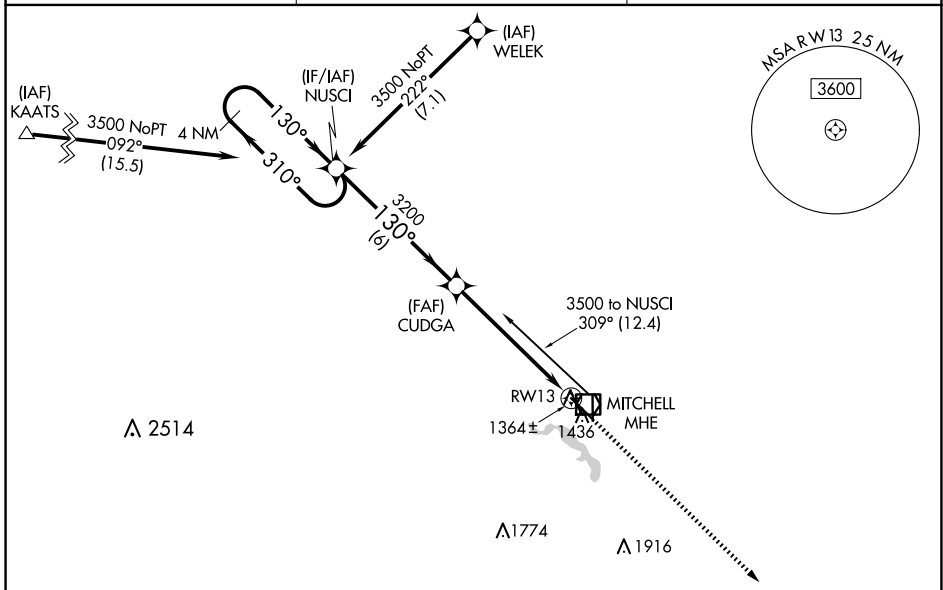

ELEV 1304	TDZE 1301
-----------	-----------

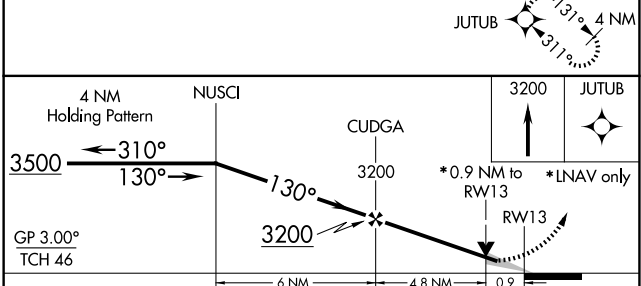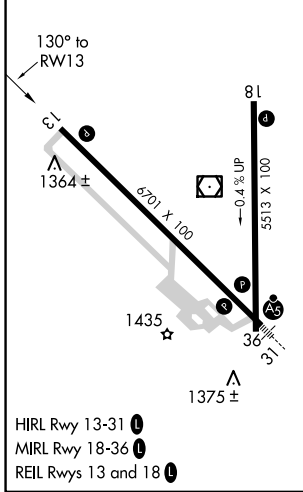

CATEGORY	A	B	C	D
LPV DA		1575-1	274 (300-1)	
LNAV/VNAV DA		1627-1¼	326 (400-1¼)	
LNAV MDA		1620-1	319 (400-1)	
C CIRCLING	1740-1¼ 436 (500-1¼)	1760-1¼ 456 (500-1¼)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)

NC-1, 20 FEB 2025 to 20 MAR 2025

NC-1, 20 FEB 2025 to 20 MAR 2025