WAAS	APP CRS	Rwy Idg	5513
CH 63038	356°	TDZE	1304
W36A		Apt Elev	1304

RNAV (GPS) RWY 36
MITCHELL MUNI (MHE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase LPV DA to 1643, and LNAV/VNAV DA to 1697. Increase all MDA 100 feet. Increase LPV visibility, all Cats, to 1⅛ mile, LNAV/VNAV visibility, all Cats, and LNAV visibility Cats C/D to 1⅜ mile and increase Circling Cat C visibility to 1¾ mile. Baro-VNAV and VDP NA when using Huron Rgnl altimeter setting.

MISSED APPROACH: Climb to 3500 direct WUNTI and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
124.175	126.25 339.8	122.8 (CTAF) L

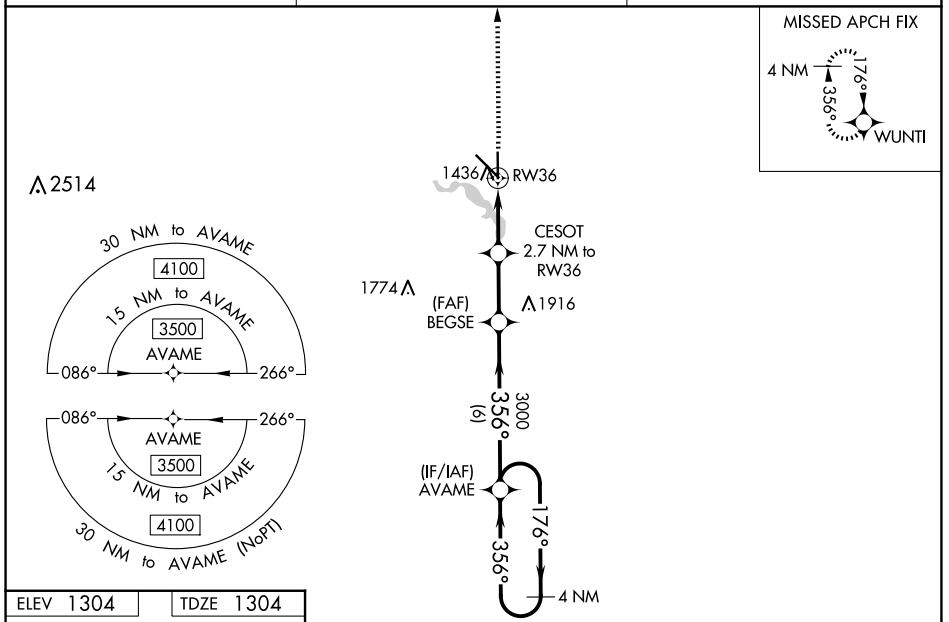

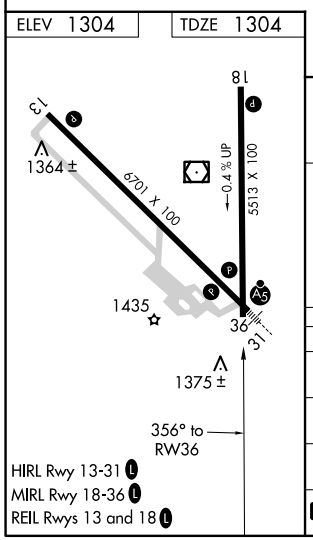

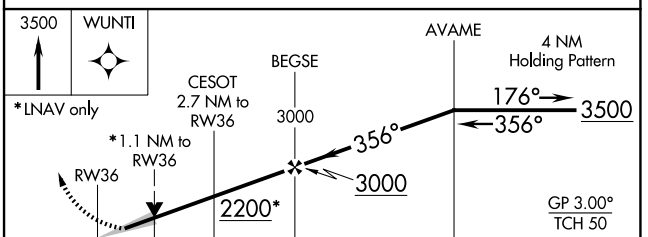

CATEGORY	A	B	C	D
LPV DA	1554-1 250 (300-1)			
LNAV/VNAV DA	1608-1 304 (400-1)			
LNAV MDA	1700-1 396 (400-1)		1700-1⅛ 396 (400-1⅛)	
C CIRCLING	1740-1 436 (500-1)	1760-1 456 (500-1)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)

NC-1, 20 FEB 2025 to 20 MAR 2025
NC-1, 20 FEB 2025 to 20 MAR 2025