


| | | | |
|---------------------------------------|------------------------|-----------------------------|---|
| VORTAC EUF 109.2 Chan 29 | APP CRS 187° | Rwy Idg TDZE Apt Elev | 5000 285 285 |
|---------------------------------------|------------------------|-----------------------------|---|

VOR RWY 18
WEEDON FLD (EUF)



NA When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ¼ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

| | | | |
|------------------------|---|---------------------------------|-------------------------------|
| ASOS 128.325 | ATLANTA APP CON * 125.5 323.1 | CLNC DEL 134.25 339.8 | UNICOM 122.8 (CTAF) |
|------------------------|---|---------------------------------|-------------------------------|

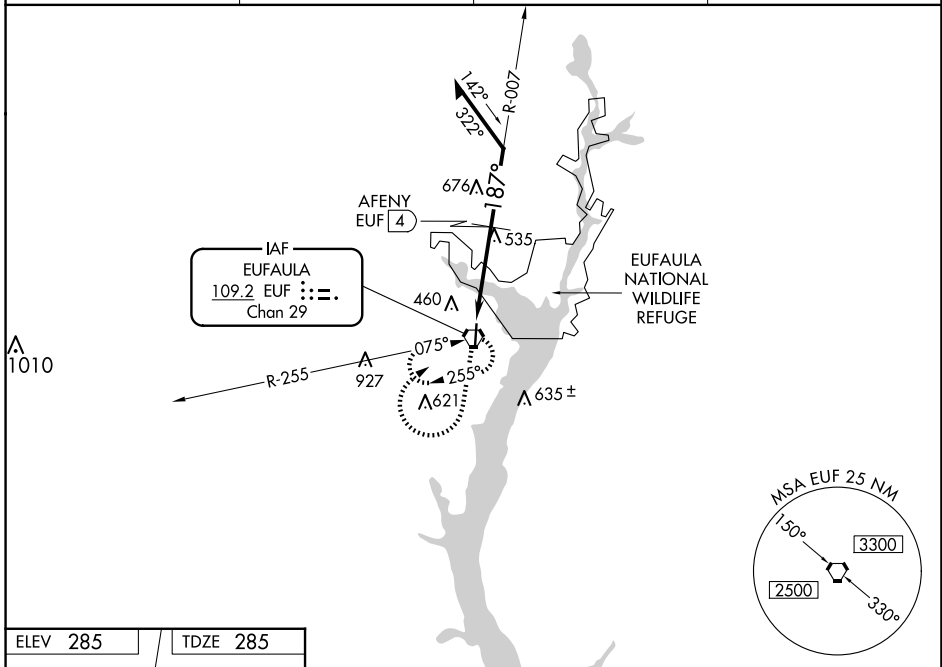

| | |
|----------|----------|
| ELEV 285 | TDZE 285 |
|----------|----------|

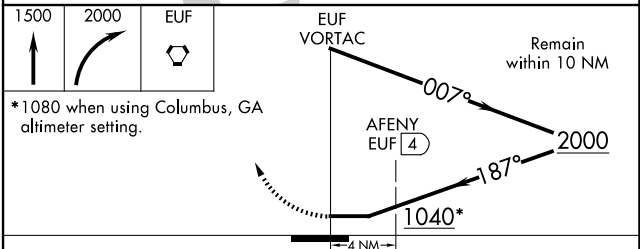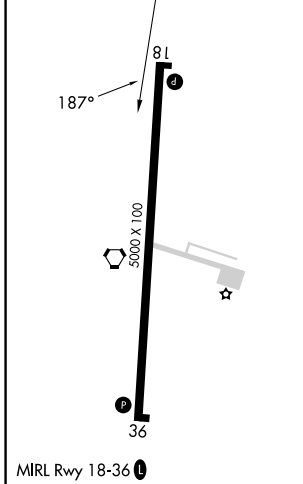

| CATEGORY | A | B | C | D |
|-----------------------------------|-----------------------|-------------------------|-------------------------|-------------------------|
| S-18 | 1040-1 755 (800-1) | 1040-1¼ 755 (800-1¼) | 1040-2 | 755 (800-2) |
| CIRCLING | 1040-1 755 (800-1) | 1040-1¼ 755 (800-1¼) | 1060-2¼ 775 (800-2¼) | 1060-2½ 775 (800-2½) |
| AFENY FIX MINIMUMS (DME REQUIRED) | | | | |
| S-18 | 900-1 | 615 (700-1) | 900-1¾ | 615 (700-1¾) |
| CIRCLING | 920-1 | 635 (700-1) | 1060-2¼ 775 (800-2¼) | 1060-2½ 775 (800-2½) |

SE-4, 20 FEB 2025 to 20 MAR 2025

SE-4, 20 FEB 2025 to 20 MAR 2025