VORTAC SVM 114.3 Chan 90	APP CRS 035°	Rwy ldg 3505 TDZE 831 Apt Elev 839

VOR RWY 6

ANN ARBOR MUNI (ARB)

When local altimeter setting not received, use Willow Run altimeter setting and increase all MDA 40 feet and Cat C/D visibility ⅛ mile and Circling Cat C/D visibility ¼ mile.
Rwy 6 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 12 and 30.

MISSED APPROACH: Climb to 3000 direct SVM VORTAC and hold.

ATIS	DETROIT APP CON	ANN ARBOR TOWER ★	GND CON	CLNC DEL	UNICOM
134.55	118.95 284.0	120.3 (CTAF)	121.6	121.6	123.0

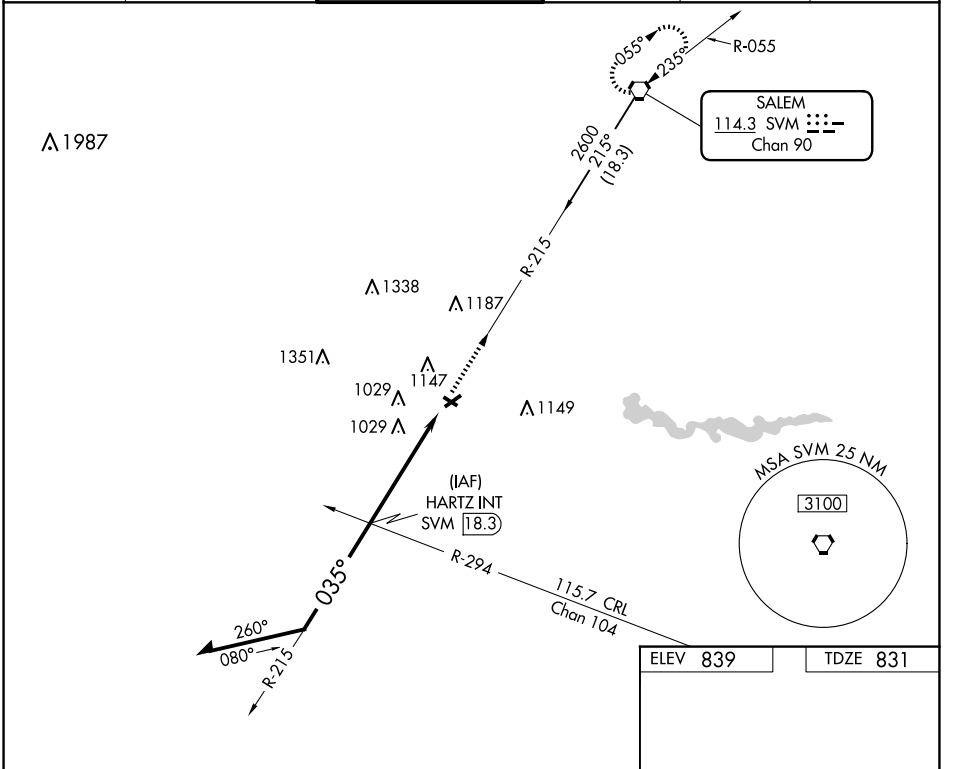

ELEV 839 TDZE 831

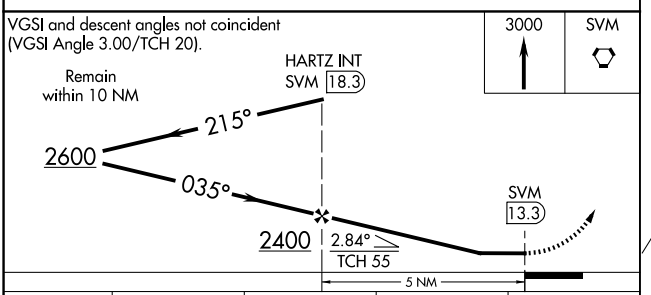



REIL Rwy 6 L
MIRL Rwy 6-24 L

CATEGORY	A	B	C	D
S-6	1360-1	529 (600-1)	1360-1½	529 (600-1½)
CIRCLING	1500-1	661 (700-1)	1500-1¾ 661 (700-1¾)	1640-2½ 801 (900-2½)

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

EC-1, 20 FEB 2025 to 20 MAR 2025
EC-1, 20 FEB 2025 to 20 MAR 2025