RNAV (GPS) RWY 5

LAURINBURG/MAXTON (MEB)

WAAS	APP CRS		
CH 90423	054°	Rwy Idg	6503
W05A		TDZE	216
		Apt Elev	216

RNP APCH.

T A Circling to Rwy 13 and 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2400 direct BAYPA and on track 059° to LORRY and hold.

ASOS	FAYETTEVILLE APP CON	GCO	UNICOM
134.125	127.8 343.725	135.075	122.8 (CTAF) L

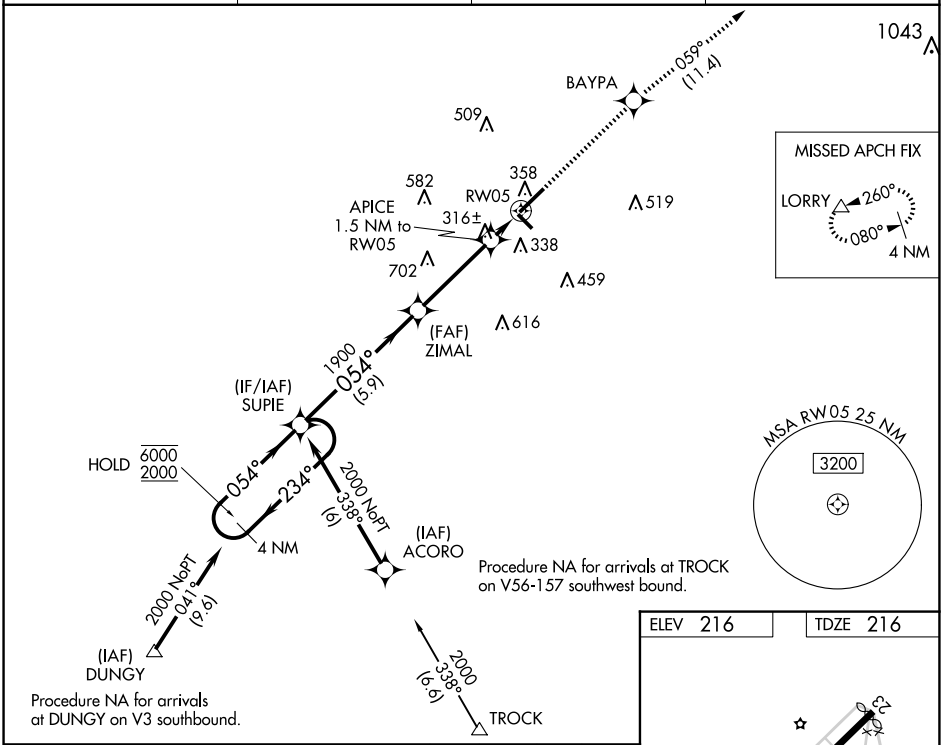

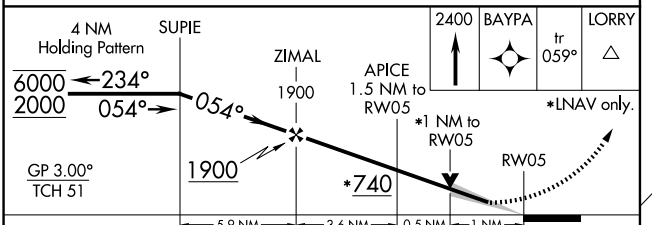

CATEGORY	A	B	C	D
LPV DA	416-½	200 (200-½)		
LNAV/VNAV DA	472-½	256 (300-½)		
LNAV MDA	580-½	364 (400-½)	580-⅝	364 (400-⅝)
C CIRCLING	740-1	524 (600-1)	780-1½	564 (600-1½)
			1020-2½	804 (900-2½)

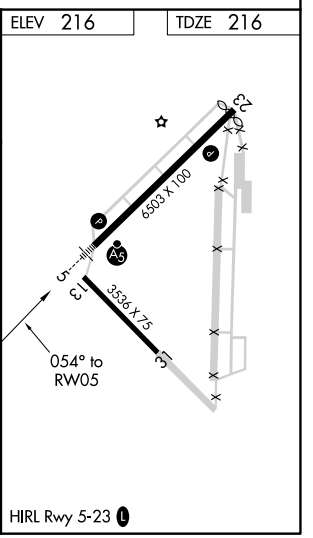

SE-2, 20 FEB 2025 to 20 MAR 2025
SE-2, 20 FEB 2025 to 20 MAR 2025