

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 99313 W19A | APP CRS 190° | Rwy Idg TDZE Apt Elev | 6604 91 91 |
|--|------------------------|-----------------------------|---------------------------------------|




RNAV (GPS) RWY 19

H L SONNY CALLAHAN (CQF)

⚠ Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
⚠ DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

| | | |
|----------------------------|--|---------------------------------|
| AWOS-3PT 118.425 | MOBILE APP CON ★ 118.5 269.3 | UNICOM 123.0 (CTAF) 0 |
|----------------------------|--|---------------------------------|

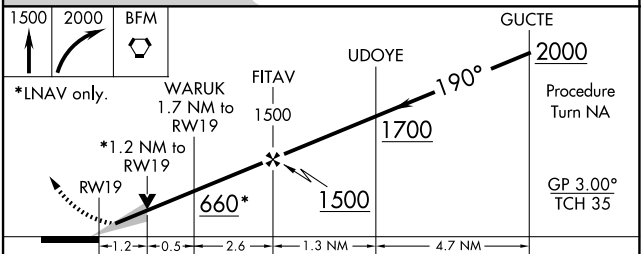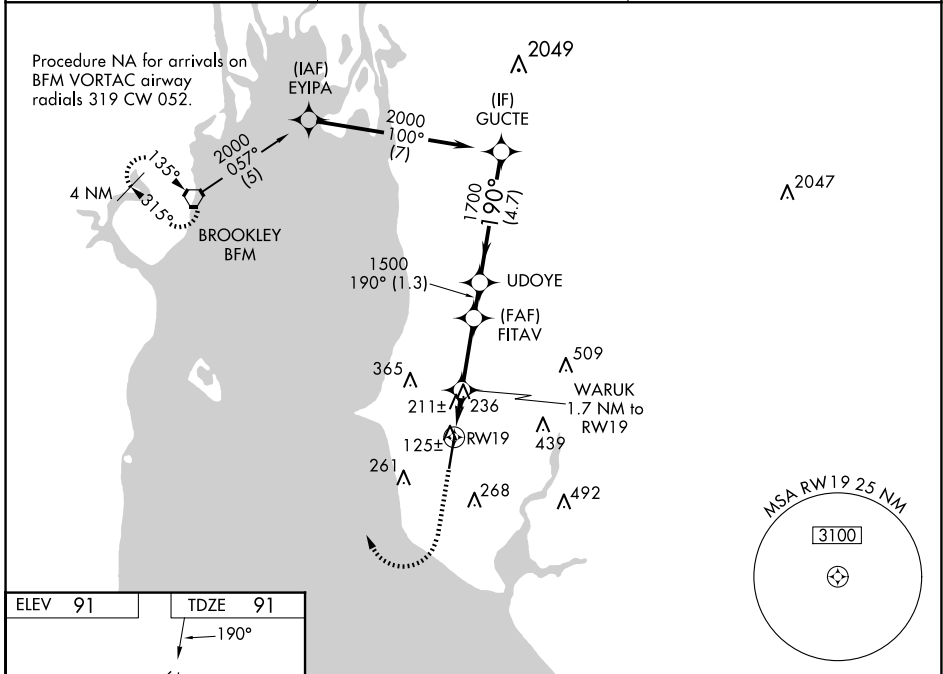

| | | | | | | | |
|--------------|-------------|-----|-----------------|-----|-----------------|--|-----------------|
| | 1.2 | 0.5 | 2.6 | 1.3 | 4.7 | | |
| CATEGORY | A | | B | | C | | D |
| LPV DA | 341-7/8 | | 250 (300-7/8) | | | | |
| LNAV/VNAV DA | 513-1 1/2 | | 422 (500-1 1/2) | | | | |
| LNAV MDA | 500-1 | | 409 (500-1) | | 500-1 1/8 | | 409 (500-1 1/8) |
| CIRCLING | 560-1 | | 580-1 | | 720-1 3/4 | | 740-2 |
| | 469 (500-1) | | 489 (500-1) | | 629 (700-1 3/4) | | 649 (700-2) |

SE-4, 20 FEB 2025 to 20 MAR 2025

SE-4, 20 FEB 2025 to 20 MAR 2025