

WAAS CH 56219 W35A	APP CRS 350°	Rwy Idg TDZE 78 Apt Elev 82	6016
--	------------------------	---	-------------

RNAV (GPS) RWY 35


SUGAR LAND RGNL (SGR)

RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
⚠ Baro-VNAV and VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting: increase all DA 51 feet; increase all MDA 60 feet and increase LNAV-VNAV all Cats visibility to 1¼, LNAV Cat C/D visibility to 1⅞, and Circling Cat C visibility to 2, Cat D to 2¼. When VGSI inop., Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 2000 direct UPAQI and on track 019° to DREWZ and hold.

ATIS 118.125	HOUSTON APP CON 123.8 257.7	SUGAR LAND TOWER* 118.65 (CTAF) 0	GND CON 121.4	CLNC DEL 121.4	CLNC DEL 119.25 (when twr closed)	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	--------------------------	--	-------------------------

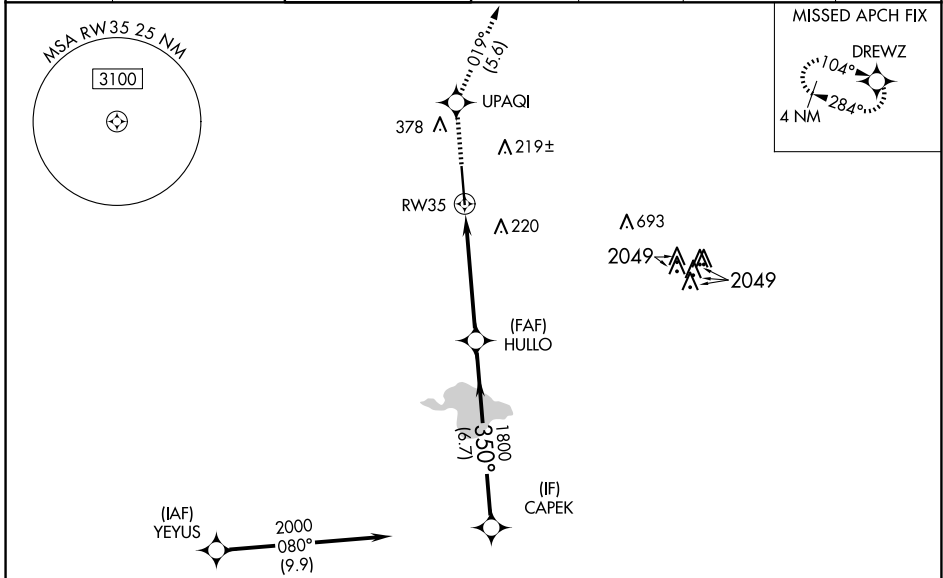

ELEV 82	TDZE 78
---------	---------

RADAR REQUIRED

2000	UPAQI	tr 019°	DREWZ
------	-------	---------	-------

* LNAV only.

* 1.7 NM to RW35

HULLO 1800

CAPEK 2000

35°

1800

GP 3.00°

TCH 56

CATEGORY	A	B	C	D
LPV DA	278-¾ 200 (200-¾)			
LNAV/VNAV DA	567-1⅝ 489 (500-1⅞)			
LNAV MDA	660-1 582 (600-1)	660-1¾ 582 (600-1¾)		
C CIRCLING	720-1 638 (700-1)	720-1¾ 638 (700-1¾)	720-2 638 (700-2)	

SC-5, 20 FEB 2025 to 20 MAR 2025

SC-5, 20 FEB 2025 to 20 MAR 2025