


LOC/DME I-APA 111.3 Chan 50	APP CRS 350°	Rwy Idg 35R 35L 10001 7001 TDZE 5885 5869 Apt Elev 5885 5885
--	------------------------	---

ILS or LOC RWY 35R



CENTENNIAL (APA)

DME required for LOC only. RADAR required for procedure entry.		MAJRS Rwy 35R	MISSED APPROACH: Climb to 7400 then climbing right turn to 9200 on heading 160° and FQF VORTAC R-197 to HOHUM INT/FQF 22.5 DME and hold.
<p>▼ Rwy 35L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-LOC 35R Cat C/D visibility to 1½ SM. Sidestep and Circling Rwy 35L NA at night.</p>			

ATIS 120.3	DENVER APP CON 132.75 269.3	CENTENNIAL TOWER 118.9	GND CON 121.8	CLNC DEL 128.6
----------------------	---------------------------------------	----------------------------------	-------------------------	--------------------------

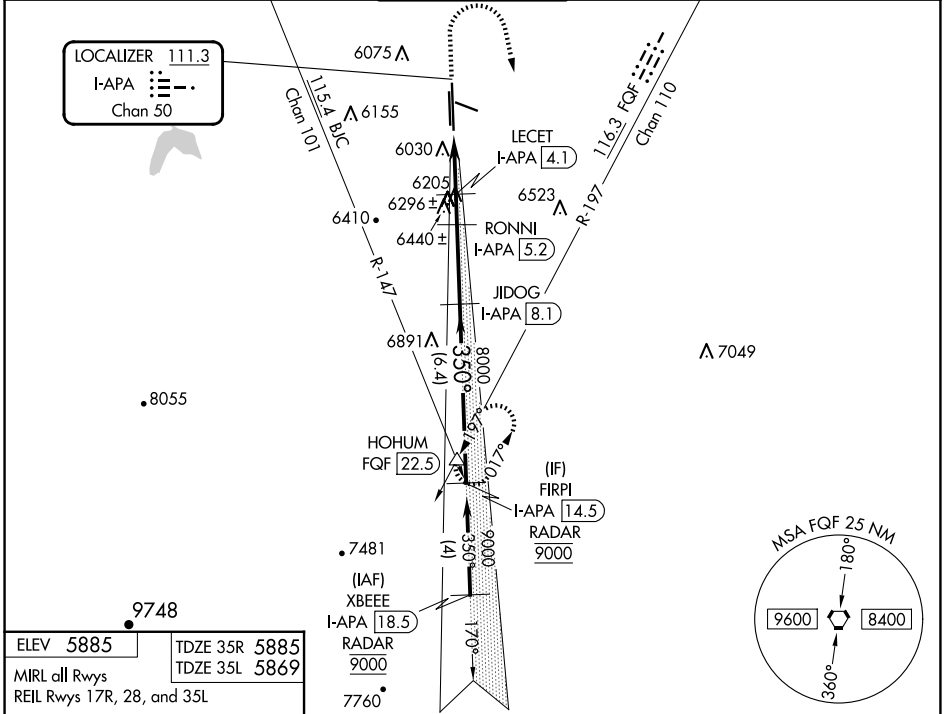

ELEV 5885	TDZE 35R 5885
MIRL all Rwys	TDZE 35L 5869
REIL Rwys 17R, 28, and 35L	

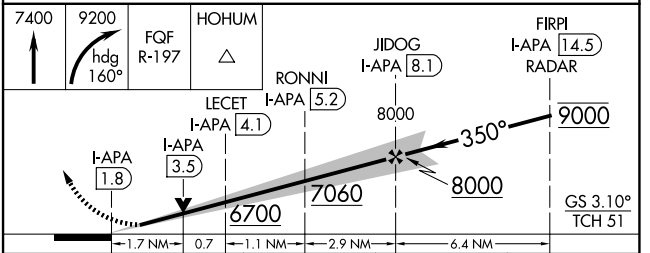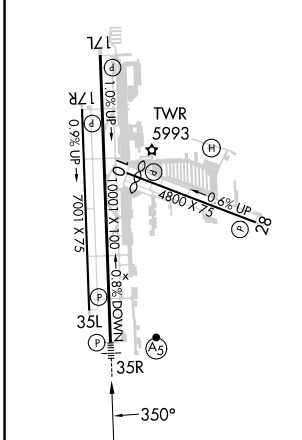

CATEGORY	A	B	C	D
S-ILS 35R	6085-½ 200 (200-½)			
S-LOC 35R	6460-½ 575 (600-½)	6460-1¼ 575 (600-1¼)		
SIDESTEP 35L	6460-1 591 (600-1)	6460-1½ 591 (600-1½)	6460-2 591 (600-2)	
CIRCLING	6460-1 575 (600-1)	6540-1 655 (700-1)	6740-2½ 855 (900-2½)	6760-2¾ 875 (900-2¾)

SW-1, 20 FEB 2025 to 20 MAR 2025

SW-1, 20 FEB 2025 to 20 MAR 2025