


|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>90316</b><br><b>W25A</b> | APP CRS<br><b>247°</b> | Rwy ldg <b>5600</b><br>TDZE <b>765</b><br>Apt Elev <b>766</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 25

OHIO UNIVERSITY (UNI)

|  |   |                           |  |
|--|---|---------------------------|--|
| <p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.</p> |   |                           | <p>MISSED APPROACH:<br/>Climb to 3000 direct CIMIX and hold.</p> |
| AWOS-3<br><b>128.325</b>   | HUNTINGTON APP CON<br><b>120.95 270.1</b> | CLNC DEL<br><b>120.95</b> | UNICOM<br><b>123.075 (CTAF) 0</b>                                |

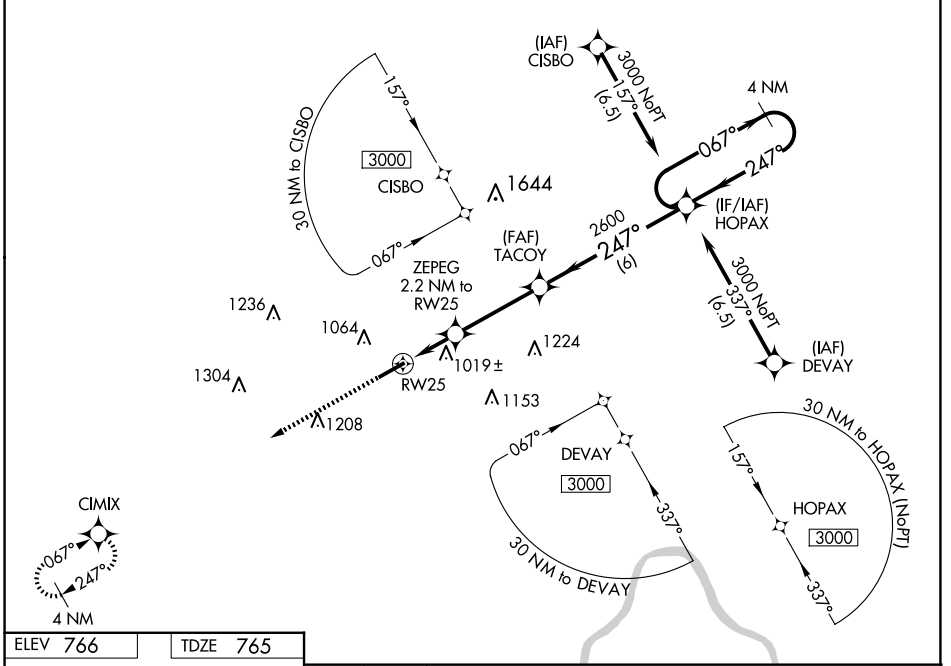

EC-2, 20 FEB 2025 to 20 MAR 2025

EC-2, 20 FEB 2025 to 20 MAR 2025

|          |          |
|----------|----------|
| ELEV 766 | TDZE 765 |
|----------|----------|

|  |       |  |  |  |  |  |                      |
|--|-------|--|--|--|--|--|----------------------|
| 3000   | CIMIX |  |  |  |  |  | 4 NM Holding Pattern |
| * LNAV only  |       |  |  |  |  |  |                      |
| <p>TACOY 2600</p> <p>ZEPEG 2.2 NM to RW25</p> <p>RW25 1500*</p> <p>HOPAX 3000</p> <p>Distances: 1.5 NM, 0.7 NM, 3.4 NM, 6 NM</p> <p>Angles: 247°, 067°, 247°</p> |       |  |  |  |  |  |                      |
| GP 3.00° TCH 49  |       |  |  |  |  |  |                      |

| CATEGORY                                     | A      | B           | C                             | D                             |
|--|--------|-------------|-------------------------------|-------------------------------|
| LPV DA                                       |        | 965-3/4     | 200 (200-3/4)                 |                               |
| LNAV/VNAV DA                                 |        | 1356-2      | 591 (600-2)                   |                               |
| LNAV MDA                                     | 1280-1 | 515 (600-1) | 1280-1 3/8                    | 515 (600-1 3/8)               |
| <input checked="" type="checkbox"/> CIRCLING | 1380-1 | 614 (700-1) | 1420-1 3/4<br>654 (700-1 3/4) | 1480-2 1/4<br>714 (800-2 1/4) |